

PRODUCT CATALOGUE 2025



Bona®

INNOVATIONS ELEVATING THE USER EXPERIENCE

In the evolving field of wood flooring installations and renovations, contractors continually seek tools and technologies that enhance efficiency, precision, and sustainability. Bona is proud to partner with contractors, working collaboratively to provide innovative solutions that enhance and support their experience every step of the way.

The updated Bona FlexiSand 1.9 exemplifies this commitment to innovation. Known for its versatility, this machine is built to cater to the varying demands of flooring professionals. The new updated version features a backlit multimeter for checking voltage and a magnetic click-on weight system, ensuring precision and ease with every task. Additionally, the Bona FlexiSand 1.9 kickstand is designed to prevent scratches on floor surfaces during accessory changes, serving as both a powerful tool and a protector of wood flooring quality. These new features not only enhance the performance of flooring professionals but also reinforce Bona's commitment to superior user experience.

With the introduction of Bona tubular bags for adhesives, we are committed to supporting contractors as they adapt and enhance their practices. The Bona Smart-Pack significantly reduces waste through its resealable, compressible packaging, which minimises plastic use. This innovation not only keeps adhesives fresh but also enhances cost-effectiveness by maximising the amount of product that can be used. Contractors embracing this change are finding a more sustainable path forward, reducing their environmental footprint without compromising on quality.

In coatings, Bona Traffic GO and Bona Mega EVO introduce new advancements. Bona Traffic GO combines ease of use with the resilience of a 2K lacquer, thanks to a self-activating hardener that simplifies application while providing strong wear resistance. Bona Mega EVO uses a self-crosslinking formula for quick drying and durable protection. When used with Bona Classic UX primer, these products work together to enhance both appearance and durability, maintaining the natural beauty of wood with a robust finish.

At the core of these groundbreaking innovations lies the Bona System, a unique system where each product harmoniously works together to elevate the user experience. This cohesive system empowers contractors by delivering tailored solutions for every flooring challenge, ensuring that projects are executed with unmatched precision and care. With a seamless synergy of products, the Bona System transforms flooring installation and renovation tasks into smooth, efficient processes, delivering exceptional results every time.





Silane-based Adhesive for wood floors
Silanbasierter Parkettklebstoff
Silanbaserat lim för trägolv
Colle à base de silane, pour parquetset sols en bois
Adhesivo en Base Silano para suelos de madera

Bona
SILANE ADHESIVE

NEW TUBULAR
3 x 6 KG
SMART-PACK



CONTENTS

READ THE
CATALOGUE
ONLINE



FASTENING

Screed Repair	10
Moisture Barriers	11
Primers	12
Levelling Compounds	13
Underlayments	14
PU Adhesives - Reactive	16
Dispersion based Adhesives	16
Silane Adhesives - Reactive	16
Application Tools	20
Fillers & Repair	23

SANDING

MACHINES

FlexiSand System	26
Dust Containment	32
Edgers	34
Orbital Sanders	35
Belt Sanders	36
Drum Sanders	38
Distressing Drums	39
Buffers	40
Other Machines	42
Storage & Transportation	43
Service Kits	44

ABRASIVES

Superior — Ceramic Mix	46
Superior — Green Ceramic	47
Premium — Zircon Mix	48
Standard — Aluminium Oxide	51
Standard — Silicon Carbide	52
Pads	54
Scrad Pads	55
Screens	56
Diamond Abrasives	57
Abrasives - Delta	57
Nets	58
Other Abrasives	59

COATINGS

Primers	62
Lacquers	64
SuperSport System	68
Oils – Wear Treatment	70
Oils – Outdoor	72
Oils - Effect Treatment	73
Fillers & Repair	74
Resilient System	75
Resilient ESD System	78
Resilient Maintenance	79

FLOOR CARE

Deep Clean System	82
Lacquer — Maintenance	83
Oils — Maintenance	84

TOOLS & ACCESSORIES

Coatings	88
Fastening	94
Measurement	96
Occupational Safety	97
Floor Care	99

APPLICATION ADVICE

Lacquer System	102
Natural Wood Look	103
SuperSport System	104
Craft Oil 2K System	105
Oil System	106
Hard Wax Oil	107
Adhesive Guidelines	108
Index of Bona Adhesives	109
Bona Product Certification Reference	110

INDEX

Index - Products	112
Index - Article Numbers	114

Purchase orders are executed according to our terms and conditions.

HIGHLIGHTS FOR 2025

BONA FLEXISAND 1.9 UPDATE

The powerful and versatile Bona FlexiSand 1.9 is the world leader in direction-free sanding. Upgraded with user-friendly features like a surrounding ambient LED light, a kickstand, a magnetic click-on weight and a backlit multimeter, Bona FlexiSand 1.9 leads the way for a truly empowered sanding experience.



Bona Traffic GO

Finish/Lacquer
✓ Ready to apply
✓ Built-in hardener for increased when applied
✓ No water - untreated pot life
✓ Clear coat - non-yellowing

5L
VCI
Bona

BONA TRAFFIC GO - ULTRA MATT

Now introducing an ultra matt sheen level of Bona Traffic GO, designed to create a natural expression of untreated wood. Bona Traffic GO is a top-performing waterborne lacquer with a built-in hardener. With a new generation of 2K hardening technology, Bona Traffic GO combines the simplicity and efficiency of a 1K lacquer with the durability and performance of a true 2K product.



PRODUCT HIGHLIGHTS

BONA SILANE ADHESIVE **TUBULAR BAGS**

Use what you need, save the rest, and maximise cost-effectiveness. Thanks to the flexible tubular characteristic, the application is cleaner and simpler. Bona Tubular bags are compressible and use less plastic, resulting in minimal waste. Discover the modern way of working.



BONA **MEGA EVO - ULTRA MATT**

In line with the trend of bringing nature indoors, we are introducing an ultra matt sheen level for Bona Mega EVO that beautifully captures the look of raw wood. Bona Mega EVO is a next generation lacquer with a new state-of-the-art crosslinking technology that activates when applied. The unique formula delivers faster curing with excellent resistance to scratches, wear, and chemicals.



FASTENING



Success begins with a good foundation. At Bona, our continuous and open dialogue with craftsmen, combined with extensive research and development enables us to provide everything you need for perfection in wood floor craftsmanship. Our latest innovation, the new tubular bag Bona Smart-Pack allows the adhesive to remain fresh and ready for application. With the resealable bags, nearly all adhesive can be used, resulting in a cost-effective method with greater coverage per package with minimal waste. In this section, you will find all the products and accessories you need to lay the best foundation, regardless of subfloor type, moisture level and condition.



1. Screed Repair
2. Moisture Barrier
3. Primers
4. Levelling Compounds
5. Underlayments
6. PU Adhesives - Reactive
7. Dispersion based adhesives
8. Silane Adhesives - Reactive
9. Application Tools
10. Fillers & Repair





Screed Repair

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona R440



Bona R440 is a solvent-free (accord. to TRGS 610), two-component silicate based cast resin with very low emissions (EC1^{Plus}). It is fast acting and ideal for the filling and sealing of cracks and joints in screeds, it can also be used to bond metal profiles and nail strips. Both components can be mixed quickly and easily by shaking. Bona R440 is ready to use within a few seconds.

Key Benefits:

- Very low emissions EC1^{Plus}
- No tools required for mixing
- Odour-free
- Fast drying

Technical Data:

Base: Sodium Silicate (water glass) and Isocyanates (Hardener)

Colour: Yellow/beige

Viscosity: Fluid

Density: 1.3 g/cm³ (immediately after mixing)

BR44006600DEBO

2 x 300 ml

5 sets

195

Wave Bonders




Metal strips (70 x 6 mm) for crack repairs in screeds. Use in combination with Bona R440.

AX34040000

100 pieces

100

Bona RenoForce



Bona RenoForce is a fibreglass weave to be used for the reinforcement of existing cracks and construction joints up to 5 mm in width, for screeds, concrete substrates, or between different type of subfloors. The installation of Bona RenoForce is easy and fast. It should be used in combination with either one of our Bona polyurethane adhesives or with the levelling compound Bona H610. One roll contains 36 m².

Key Benefits:

- Non hazardous product
- Gives a lasting result
- The usage of liquid resins is no longer necessary

Technical Data:

Product type: Sodium-silicate glass fibres

Colour: White

Tensile strength on filament (fibre):
3,500 N/mm²

BH500033

0.8 x 45 m

1

24



Moisture Barriers

Bona R540



Multipurpose primer/damp-proof membrane for both absorbent and non-absorbent subfloors. Can be used for damp-proofing concrete or cementitious subfloors with up to 5 CM% (or 95% RH) in humidity. Compatible with Bona's silane and PU adhesives.

Key Benefits:

- Moisture inhibiting
- Excellent penetration properties
- 1-component and ready to use

Technical Data:

Base: 1-comp PU

Drying time: 1-24 h, depending on type of adhesive

Application: Stainless steel trowel, mohair roller, brush

BR54002200M1BO

6 kg

1

60

Bona R590



Liquid moisture barrier giving added strength to the floor. Suitable for sealing against residual moisture in cement or concrete screeds (with up to 5% CM / 90%RH) prior to installation of wood floors or levelling compounds. Contains no liquid extenders or components that can migrate after curing.

Key Benefits:

- Reinforcing effect
- Suitable for all Bona silane or polyurethane adhesives
- Fast drying
- Free from liquid extenders and plasticisers

Technical Data:

Base: 1-comp silane modified

Drying time: 4-6 h

Tools of application: Bona 500F notched trowel or flat trowel

Consumption: 150-500 g/m²

BR59002300M1BO

8 kg

1

60

Other Products

Quartz Sand



Fine quartz sand for distribution onto wet Bona R590. Can also be added to Bona levelling compounds for greater application thickness. Grain size 0,3 – 0,8 mm.

AX36500000

25 kg

1

40



FASTENING

Primers

Article Number

Packaging

Pcs/transport package

Package/pallet

Bona D501



Primer for the preparation of absorbent and non-absorbent substrates prior to the use of silane-based adhesives. Binds dust effectively. Use undiluted.

Key Benefits:

- Vapour permeable
- Solvent-free
- Very quick drying

Technical Data:

Base: 1-comp acrylate

Drying time: 1–2 h

Application: Brush, roller

Consumption: Approx. 150 g/m²

BD50102000MLBO

5 L

3

44

Bona D515



Multi-purpose primer concentrate for preparation of absorbent and non-absorbent substrates.

Key Benefits:

- Multifunctional use
- Adhesion promoter on smooth and dense substrates
- Good adhesion to many substrates

Technical Data:

Product type: Synthetic dispersion

Drying time: 0.5–24 h (depending on the subfloor)

Application: Brush, roller

Consumption: Approx. 40–150 g/m²

BD51502400MLBO

10 Kg

1

60



Levelling Compounds

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona H600



A cementitious, self-smoothing levelling compound specially designed for the tough strains that wood floors place on the subfloor. Also suitable for use prior to the installation of LVT's (Luxury Vinyl Tiles). Apply to 1.5–10 mm thickness.

Key Benefits:

- Self-smoothing
- Rapid hardening
- High strength

Technical Data:

Base: Cement, synthetic resins
Colour: Light grey
Consumption: 1.4 kg/m²/mm
Layer thickness: 1 - 20 mm
Dilution: ca. 6.5 litre of water
Slack time*: ca. 5 min (re-stir)
Pot life*: ca. 30 min
Walkable*: after approx. 1.5 to 2 hrs.

BH60042060DE

25 kg

1

42

Bona H610



Bona H610 is a rapid setting and drying, slump free repair mortar for internal repairs. Ideal for filling holes and cracks in screeds, repairing and refacing internal concrete stair treads and risers, cement and sand screeds, concrete floors or making good around pipe work, door and window frames.

Key Benefits:

- Slump free
- Rapid hardening and drying – can be covered after 60 minutes.
- Low tension

Technical Data:

Base: Cement, synthetic resins
Colour: Grey
Consumption: 1.6 kg/m²/mm
Layer thickness: no limitation
Dilution: ca. 5 litre of water
Pot life*: ca. 15-20 min
Walkable*: after approx. 30 min

BH61042003M1

25 kg

1

42

Bona H660



Bona H660 is a cementitious smoothing levelling compound specially designed for use under mosaic, multi-layered or solid wood parquet in commercial sectors.

Key Benefits:

- Self levelling
- Self-smoothing
- Quickly walkable
- Applicable in a thickness layer from 1 to 10 mm (with Quartz sand up to 20 mm)

Technical Data:

Base: Cement, synthetic resins
Colour: Grey
Consumption: 1.4 kg/m²/mm
Layer thickness: 1 - 20 mm
Dilution: ca. 6.5 - 7 litre of water
Pot life*: ca. 30 min
Walkable*: after approx. 1.5 to 2 hrs.

BH66042001M1

25 kg

1

42



FASTENING

Levelling Compounds

Bona Fibers



Bona Fibers are alkali-resistant reinforcement glass fibers designed primarily to increase the flexural and structural strength of Bona self-levelling compounds, e.g. Bona H600. In addition, an increase in the adhesion and strength of the levelling compound is also seen. Bona Fibers do not change the handling properties of the Bona levelling compound. The use of Bona Fibers is recommended on flexible subfloors, for example nailed/screwed down planks or board floors, such as chipboard, OSB or plywood, fixed over joints or battens.

Key Benefits:

- Easy to add and mix
- Levelling behaviour is unaffected.
- Bona Fibers will remain evenly distributed and will not 'float' to the surface.
- Increases the flexural and structural strength of the Bona levelling compounds

Technical Data:

Base: Alkali-resistant fibreglass
Colour: White
Tensile strength: 1700 N/mm²

BH500031

0.25 kg

10

27 boxes

Bona Expansion Strips



Bona Expansion Strips 50 are self-adhesive foam strips, used in order to avoid sound bridges between levelling compounds and building components.

Key Benefits:

- Ideal for use with levelling compound and thin screeds
- Self-adhesive, easy and quick to install
- Very good grip
- Remains straight on the wall

Technical Data:

Product type: PE-Foam with fleece backing and fleece socket (self-bonding)
Dimensions: 20 m x 50 mm, rolls
Material thickness: 5 mm

BH500032

20 m

5

90

Underlayments

Bona U300



Bona U300 is an underlayment made of recycled fine PUR foam granules and cork, bound with PUR elastomers. Bona U300 can be used under parquet, laminate floors and other floor coverings. It will reduce the transmission of sound from footfall. It is also suitable for a light stress decoupling.

Key Benefits:

- Easy to install
- Suitable for use with various
- Bona adhesives

Technical Data:

Base: Fine recycled PUR granules and cork
Colour: Brown/black-grey-beige-brown
Fire protection class: Efl (EN 13501)
Impact sound reduction: Up to 19 dB



2 mm

AX36225002

30 m²

1

11

3 mm

AX36225003

20 m²

1

11

5 mm

AX36225005

16 m²

1

8



FASTENING

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Underlayments

Bona U310



Bona U310 is a polyester spunbond fleece that reduces the stress transferred to the subfloor when laying prefabricated parquet, solid parquet and laminate on old parquet or other critical subfloors. Hairline/shrinkage cracks in mineral sub floors can be bridged up to a width of 0.5 mm. Due to its high tear resistance, the decoupling fleece reduces tensions from the subfloor and keeps them away from the subsequent top layer.

Key Benefits:


- Easy to cut
- Stress relieving
- Suitable for use with most Bona adhesives
- DIBt approval

Technical Data:

Base: Polyester spunbond
Colour: Light green
Weight: 160 g/m²
Thickness: 0.8 mm

1 mm	AX36310003	50 m ²	1	
------	------------	-------------------	---	--

Bona U340



Bona U340 is a polyester fibreboard underlay that reduces the stress transferred to the subfloor when installed prior to the final floor covering e.g. ceramic tiles, natural stone, wood flooring, etc. Its high compressive strength renders it capable of tolerating high loads (up to 5.0 kN/m²). It is suitable for use in domestic and commercial premises. Additionally, acoustic dampening for all floor types is significantly improved. It is easy to cut, shape and install and is unaffected by dampness and fungal decay.

Key Benefits:

- Reduces subfloor stress
- Bridges cracks/breaks in the subfloor
- Traffic load up to 5 kN/m²
- DIBt approval

Technical Data:

Product/material: Polyester bonded Fibreboard
Dimensions: 1000 x 600 x 4, 9 and 12 mm
Weight: 4 mm = 3.1 kg/m²
Compressive strength: (DIN 53456) 10 N/mm²
Bending strength: (DIN 53453) 2 N/mm²
Tensile strength: (DIN 53457) 6.0 N/mm²
Floor-load capacity: 5.0 kN/m²

4 mm	AX36340004	0.6 m ²	1	200
9 mm	AX36340009	0.6 m ²	1	100
12 mm	AX36340012	0.6 m ²	1	80

Bona U350



Bona U350 is a permanently elastic underlay that can be used for decoupling and impact sound insulation under engineered parquet. The special structure consisting of a mineral middle layer and fleece lamination on both sides, ensures a reduction of shear and tensile force between the parquet and the subfloor.

Key Benefits:

- Decoupling and impact sound insulation in one
- Low installation height
- Bridges hairline cracks in the screed
- Easy to cut
- DIBt approval

Technical Data:

Base: Mineral fillers and PUR binder with fleece lamination on both sides
Dimension: 750 x 500 mm (+/- 0,15 mm)
Board thickness: 3 mm (+/- 0,15 mm)
Basis weight: 3 Kg/m²
Thermal insulation resistance: 0.01 m²K/W (according to DIN EN 16354:2019-01)
Compressive strength: Up to 8 t/m² (acc. to DIN EN 826 (250 Pa, 0,5 mm)
Impact sound improvement: Up to 18 dB

3 mm	AX36350013	6 m ²	16	480
------	------------	------------------	----	-----



PU Adhesives - Reactive

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona R200



Liquid repair material for filling hollow spots in parquet floors as well as reattaching loose elements and boards. Once injected the material expands and effectively fills up the hollow space.

Key Benefits:

- Simple solution to a difficult problem
- Excellent adhesion properties
- Contains no water or solvents

Technical Data:

Base: 1-comp PU
Drying time: 4 h

BR20005900M1BO

530 g

6

Dispersion based Adhesives

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona D750



Solvent-free, fibre-reinforced dispersion adhesive for the installation of LVT flooring on absorbent sub-floors. It has excellent grab, and is ideal for use with PVC-category floors. Thanks to its high shear resistance, D750 helps in minimising joint formation. For interior use only.

Key Benefits:

- High shear strength
- Quick and excellent grab
- No venting required, floor coverings can be placed directly

Technical Data:

Base: 1-comp PVAC, fibre-reinforced
Colour: Beige
Application: Notched trowel
Venting time: ca. 5-10 min
Open time: ca. 20 min
Consumption: ca. 250-280 g/m²

BD75002700M1BO

14 kg

1

32

Silane Adhesives - Reactive

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Titan



The improved Bona Titan is a powerful and hard adhesive, containing revolutionary Titanium Technology with extended open time and accelerated crosslinking. Suitable for use on all types of wood floor installations, including extra wide planks. Quadruple crosslinking system ensures fast, safe and complete hardening, even under unfavourable conditions.

Key Benefits:

- Light traffic possible after 4 hrs.
- Ideal for extra wide planks
- Rapid strength build up

Technical Data:

Base: 1-comp silane modified prepolymer
Density: 1.7 g/cm³
Colour: Oak tone
Application: Notched trowel
Open time: ca. 40 min
Consumption: ca. 850-1500 g/m²

BRTIT02800M1BO

15 kg

1

44



FASTENING

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Silane Adhesives - Reactive

Article Number

Packaging

Pcs/transport
package

Package/
pallet

Bona Quantum



Bona Quantum featuring revolutionary Titanium Technology. The formula delivers outstanding strength that evolves over time – giving optimal strength once set. Its unique formula offers the advantages of both hard-elastic and hard adhesive in one effective product. Bona Quantum is a great all-round product that delivers fantastic performance, whatever the job.

Key Benefits:

- Titanium crosslinking technology
- Built-in moisture barrier
- Allround usage
- High shear strength

Technical Data:

Base: Silane modified pre-polymers

Colour: Oak tone

Application: Notched trowel

Open time: ca. 40 min

Consumption: ca. 850-1500 g/m²

Consumption with Trowel Plus: ca. 2000-2200 g/m²

BRQUA02800M1BO	15 kg	1	44
BRQUA02206M1BO	6 kg	3	36

Bona Quantum T



Bona Quantum T holds all the great benefits and performance of Bona Quantum, but in a thicker formulation. The formula delivers outstanding strength that evolves over time – giving optimal strength once it sets. It offers the advantages of both a hard-elastic and a hard adhesive in one effective product.

Key Benefits:

- Titanium crosslinking technology
- Built-in moisture barrier
- Allround usage
- High shear strength

Technical Data:

Base: Silane modified pre-polymers

Colour: Oak tone

Application: Notched trowel

Open time: ca. 40 min

Consumption: 850-1500 g/m²

Consumption with Trowel Plus: ca. 2000-2200 g/m²

BRQUAT2800M1BO	15 kg	1	44
BRQUAT5601M1BO	1 kg	20	36
BRQUAT5703M1BO	3 kg	6	30
BRQUAT5845M1BO	4.5 kg	4	21
BRQUAT2206M1BO	6 kg	3	36
BRQUAT6809M1BO	9 kg	2	30



Silane Adhesives - Reactive

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona R848



Bona R848 is a hard-elastic, one-component, silane-based adhesive, suitable for dimensionally stable multilayered, engineered parquet. Bona R848 reduces tension to the sub floor. The use of a primer is generally not necessary. The adhesive hardens due to a chemical reaction with moisture.

Key Benefits:

- Easy to apply
- Fast initial bonding strength allows load after 24 h
- Good rib stability

Technical Data:

Base: 1-comp silane modified**Density:** 1.6 g/cm³**Colour:** Beige**Shelf life:** Up to two years**Application:** Notched trowel**Open time:** ca. 30 min**Consumption:** ca. 850–1250 g/m²

BR84802800M1BO	15 kg	1	44
BR8485601M1BO	1 kg	20	36
BR8485845M1BO	4.5 kg	4	21
BR84802206M1BO	6 kg	3	36
BR8486809M1BO	9 kg	2	30

Bona R848T



Bona R848T is a higher viscosity version of Bona R848. It is a hard-elastic, one-component, silane-based adhesive. Best known for its improved rib stability and quick initial bonding strength, Bona R848T can be used for the installation of solid timber floors; including overlay, parquet, blocks and engineered floors.

Key Benefits:

- Easy to apply
- Fast initial bonding strength allows load after 24 h
- Up to two year shelf life
- Perfect rib stability, no risk of hollow spots

Technical Data:

Base: 1-comp silane modified**Density:** 1.6 g/cm³**Colour:** Beige**Application:** Notched trowel**Open time:** Approx. 30 min**Consumption:** ca. 850–1250 g/m²

BR848T2800M1BO	15 kg	1	44
BR848T5601M1BO	1 kg	20	36
BR848T5703M1BO	3 kg	6	30
BR848T5845M1BO	4.5 kg	4	30
BR848T2206M1BO	6 kg	3	36
BR848T6809M1BO	9 kg	2	30



FASTENING

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Silane Adhesives - Reactive

Article Number

Packaging

Pcs/transport
package

Package/
pallet

Bona Quantum LVT



Bona Quantum LVT is a silane-based LVT flooring adhesive for installation of LVT- or multi-layered modular floorings according to EN 16511. The adhesive differs from conventional wet bed adhesives with its very high initial bonding strength. The floor covering is fixed immediately but can still be adjusted.

Key Benefits:

- Very high initial bonding strength
- Long open time
- Very low consumption

Technical Data:

Base: 1-comp silane modified
Colour: Beige
Application: Notched trowel
Open time: approx. 45 min
Consumption: approx. 180-250 g/m²

BRQUA0230LVTBO

8 kg

1

60

Bona Vertical



Bona Vertical is a construction adhesive with extremely high initial bonding strength and fast setting speed for quick and easy installation. The construction adhesive can be applied to a variety of substrates and materials such as wood, stone, metal and concrete.

Key Benefits:

- Quick grab and hardening
- High strength
- Excellent adhesion properties

Technical Data:

Base: 1-comp silane modified
Colour: Beige
Application: Adhesive gun
Open time: Approx. 10 min
Application of load: 4-8 h

BRVER00300M1BO

0.5 kg

12



FASTENING

Application Tools

Adhesive gun

Applicator guns for 310 ml cartridges or 1 kg tubular bags (e.g. Bona R848T)



600 ml

AT32042000

1

Bona OptiSpread



Bona OptiSpread UX

Bona OptiSpread System consists of the Bona OptiSpread 2.0 for the application of our 4.5 kg adhesive sausages, and the Bona OptiSpread UX for the application of our 9 kg adhesive sausages. Both applicators are equipped with a powerful 18.8 V lithium battery. Nozzles available in 250 mm and 500 mm widths are ideal for the fast and ergonomic installation of wood floors in both residential and commercial areas.

Key Benefits:

- Fast, ergonomic, and clean adhesive application
- Reduces adhesive waste
- Low weight
- Powerful 18.8 V battery for lasting adhesive application

OptiSpread UX

AT32046061

9 kg

1

OptiSpread 2.0

AT32046051

4.5 kg

1



Bona OptiSpread 2.0

ACCESSORIES

Nozzle Adapter

AT32046053

500 mm

Nozzle Adapter

AT32046054

250 mm

Thread Cap
for Nozzles

AT32046055

Spare Nozzle
1250 F

AT32046056

250 mm

Spare Nozzle
850 F

AT32046057

250 mm

Spare Nozzle
1250 F

AT32046058

500 mm

Spare Nozzle
1500 F/G

AT32046059

500 mm

Plastic Caps
for Nozzles

AT32046060

Bona Trowel 500F

Notched trowel appropriate for applying Bona R590, silane-based damp-proof membrane.



500F (A3)

AT31400280

180 x 150 mm

10

500F (A3)

AT31400380

250 x 150 mm

10



Application Tools

Bona Notched Trowel



Notched trowels for adhesive application.

200F (A2)	AT31413180	180 x 150 mm	10	
200F (A2)	AT31413250	250 x 150 mm	10	
850F (B3)	AT31401180	180 x 150 mm	10	
850G (B6)	AT31402180	180 x 150 mm	10	
850G (B6)	AT31402250	250 x 150 mm	10	
1000F (B8)	AT31403180	180 x 150 mm	10	
1000G (B10)	AT31404180	180 x 150 mm	10	
1000G (B10)	AT31304250	250 x 150 mm	10	
1250F (B12)	AT31405180	180 x 150 mm	10	
1250G (B13)	AT31406180	180 x 150 mm	10	
1500F (B14)	AT31409180	180 x 150 mm	10	
1500G (B16)	AT31410180	180 x 150 mm	10	

Bona Trowel Plus



Custom trowel for gluing down wood floors while establishing a moisture barrier in the same stroke in combination with Bona Quantum/Quantum T.

	AT31400170			
--	------------	--	--	--

Bona Master Trowel 280 mm



A basic adhesive trowel for holding notched trowels in different sizes. Application width 280 mm. To be used with Bona Notched Trowel Box.

	AT31413251	280 x 150 mm		
--	------------	--------------	--	--

Bona Notched Trowel Box 280 mm



Plastic box with 10 trowel blades to be used with Bona Master Trowel 280 mm.

TKB A2	AT31413252		10	
TKB A3	AT31413253		10	
TBK B1	AT31413254		10	



Application Tools

Bona Master Trowel
180 mm



A basic adhesive trowel for holding notched trowels in different sizes. Application width 180 mm. To be used with Bona Notched Trowel Box.

	AT31413259	180 x 145 mm		
--	------------	--------------	--	--

Bona Notched Trowel Box
180 mm



Plastic box with 10 trowel blades to be used with Bona Master Trowel 180 mm.

TKB B8	AT31413255		10	
TKB B10	AT31413256		10	
TKB B12	AT31413257		10	
TKB B13	AT31413258		10	
TKB B1	AT31413261		10	
TKB A2	AT31413262		10	
TKB A3	AT31413263		10	
TKB A4	AT31413264		10	
TKB A5	AT31413265		10	



Fillers & Repair

Bona Gap Master



Bona Gap Master is an acrylic-based mastic for sealing gaps between wood floors and skirting boards & thresholds. It can also be used to repair damages and to fill gaps and cracks in the floor.

Key Benefits:

- Permanently elastic (max 15% tolerance)
- High initial and final bonding strength
- Odourless

Technical Data:

Material: Acrylate

Drying time: approx. 18–24 h. Full hardness is achieved after approx. 2–3 days depending on climate and size of gap.

Consumption: Depends on size of the gap.

Stone Grey	AF4411312503	310 ml	12	60
Dark Beech	AF4411311003	310 ml	12	60
Ash/Fir	AF4411311103	310 ml	12	60
Dark Oak	AF4411311203	310 ml	12	60
Medium Oak	AF4411311213	310 ml	12	60
White	AF4411311303	310 ml	12	60
Maple	AF4411311403	310 ml	12	60
Light Beech	AF4411311503	310 ml	12	60
Light Oak	AF4411311603	310 ml	12	60
Cherry	AF4411311703	310 ml	12	60
Bog Oak	AF4411311803	310 ml	12	60
Wenge	AF4411311903	310 ml	12	60
Black	AF4411312003	310 ml	12	60
Nut	AF4411312103	310 ml	12	60
Teak	AF4411312203	310 ml	12	60

SANDING



The key to great sanding results lies in the perfect combination of machines and abrasives. Bona sanding tools not only deliver exceptional results, our systems are also developed with maximum efficiency, ergonomics and safety in mind. With innovations such as dust-free sanding, we continuously strive to find new ways to improve the craftsman's working environment and process. The powerful and versatile Bona FlexiSand 1.9 is the pioneering world leader in direction-free sanding. Upgraded with new user-friendly features like a surrounding ambient LED light, a kickstand, a magnetic click-on weight and a backlit multimeter, Bona FlexiSand 1.9 leads the way for a truly empowered sanding experience.



1. FlexiSand System
2. Dust Containment
3. Edgers
4. Orbital Sanders
5. Belt Sanders
6. Drum Sanders
7. Distressing Drums
8. Buffers
9. Other Machines
10. Storage & Transportation
11. Service Kits
12. Abrasives





SANDING | MACHINES

FlexiSand System

Bona FlexiSand 1.9



Powerful and versatile buffer for all flooring needs, from bare wood sanding to concrete grinding. The Bona FlexiSand 1.9 is the core of a flexible and powerful system with tools and accessories to handle any kind of renovation challenge, from sanding down to the bare wood, fine abrading, sanding resilient surfaces, to concrete grinding. The smart, compact design makes it both capable and easy to handle. Upgraded with user-friendly features like surrounding ambient LED lights, a kickstand to avoid pressure on discs, a magnetic click-on weight and a backlit multimeter with better power supply information.

Key Benefits:

- Powerful single-speed motor
- Foldable handle reduces space during transportation
- Large wheels for easy transportation
- Bona Power Drive ready

Technical Data:

Abrasive disc speed: 147 rpm
Motor Power: 1.9 kW
Total weight: 50 kg
Height/Width/Depth: 1170 mm / 490 mm / 640mm

Ø 407 mm

AMO310003

230 V / 50 Hz

1

1.9 kW

Bona FlexiSand 1.5



Versatile buffer that is effective for a wide variety of floor preparation and sanding jobs. Bona FlexiSand 1.5 can be equipped with different drive plates for different jobs. With its powerful 1.5 kW motor and robust construction, the FlexiSand always operates smoothly. Compatible with the unique Bona Power Drive, allows for powerful and direction-free sanding down to bare wood.

Key Benefits:

- Powerful single-speed motor
- Foldable handle reduces space during transportation
- Large wheels for easy transportation

Technical Data:

Abrasive disc speed: 147 rpm
Motor Power: 1.5 kW
Total weight: 45 kg
Height/Width/Depth: 1170 mm / 490 mm / 640mm

Ø 407 mm

AMO310001

230 V / 50 Hz

1

1.5 kW

FlexiSand System

LED light bar



Surround LED light bar that emits a strong, cool light with uniform illumination all around the machine. Having a clear view of your work is essential for achieving outstanding results. With the LED light bar mounted on your Bona FlexiSand you will have perfect visibility of the floor even if the room lighting is poor. The light bar is easy to attach and to remove.

LED

ASK3199944000

230 V

1

50 Hz/60 Hz



SANDING | MACHINES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

FlexiSand System

Kickstand



The kickstand with wheels protects both the floor surface and the Bona FlexiSand by removing the repeated pressure on the sanding discs. When tilted, it allows for handling the machine safely and easily during abrasive and sanding plate changes.

ASK3199940061	1.9 kg	1	
---------------	--------	---	--

Magnetic extra weight



Optimised 11 kg weight with a magnetic click-on connection for an easy switch of the load depending on the sanding operation. The added weight to the machine gives a more powerful sanding, making it particularly effective for coarse sanding and removing adhesive residues.

ASK3199940015	11 kg	1	
---------------	-------	---	--

Bona Power Drive



Use Bona Box XL for storage and transportation

The innovative Bona Power Drive, to be used exclusively with the Bona FlexiSand 1.5 and 1.9, sets the standard for sanding down to bare wood. Using a direction-free sanding technique, the drive combines excellent performance with easy operation. Four rotating discs sand closely to the walls reducing the need for edge sanding. The geared plate and revolving discs also deliver increased power for excellent performance in bare wood sanding when used in combination with Bona 8700 Ceramic abrasives.

Key Benefits:

- For powerful rotary sanding to bare wood
- Reduces need for edge sanding. Only leaves a 3 cm strip against the wall.
- Delivers a fantastically fine and smooth sanding result
- Failsafe, no risk of drum marks and similar

Technical Data:

Compatible with: Bona FlexiSand 1.5 / 1.9
No. of discs: 4
Disc diam.: 150 mm
Weight: 6.7 kg
Dimensions: 410 mm / 410 mm / 93 mm

Ø 407 mm	ASK3199940997	4 x Ø 150 mm	1	
----------	---------------	--------------	---	--

Internal Spur Gear



Gear ring for the Bona FlexiSand.

Ø 407 mm	ASK3199940082	1	1	
----------	---------------	---	---	--



SANDING | MACHINES

FlexiSand System

Bona Quattro Disc



Use Bona Box XL for storage and transportation

Four disc plate for an excellent surface finish. Perfect for reducing and smoothing out drum marks and rotational scratches from edger machines. The Bona Quattro Disc will optimise your sanding results and is perfectly balanced for high efficiency combined with smooth end results.

Ø 407 mm

ASO312530

4 x Ø 150 mm

1

Bona MultiDisc



With its six disc construction, the Bona MultiDisc creates an exceptionally smooth and flat surface finish. A tool perfect to use before staining or oiling wooden floors with pigmented oil.

Ø 407 mm

ASO312520

6 x Ø 125 mm

1

Replacement Pad Set



Replacement for broken or used pads for the Bona Quattro Disc.

Ø 150 mm

ASO319934

4 x Ø 150 mm

4

Ø 125 mm

ASO319936

6 x Ø 125 mm

6

Bona Pad Drive



The Bona Pad Drive is delivered with the Bona FlexiSand. A multipurpose tool that can be used to drive different pads and abrasive materials for a large number of applications including oiling, cleaning, buffing and superficial sanding.

Ø 407 mm

ASO312501

1

Tampico Brush



The Tampico brush is 407 mm soft-bristle brushing attachment for the Bona FlexiSand, to thoroughly clean the wood grain after the final sanding or screening, ensuring optimal conditions for staining or sealing.

Ø 407 mm

ASK3100030716

1



SANDING | MACHINES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

FlexiSand System

Type

Article Number

Packaging

Pcs/transport
package

Package/
pallet

Bona Power Drive Connect



Use Bona Box XL for
storage and transportation

Using a unique direction-free sanding and brushing technique, Bona Power Drive Connect combines excellent performance with easy operation. Mounted on the Bona FlexiSand, it can remove thick layers of lacquer, replacing the need for conventional belt sanding. Its click-on mount enables you to switch between disc and brush within a minute. The drive plate is easy to manoeuvre in small, confined spaces and can be used regardless of the direction of the wood.

Key Benefits:

- Flexible - one drive plate for both sanding and brushing jobs.
- Less edge sanding needed
- Delivers a fantastically fine and smooth sanding result
- Fail safe, no risk of drum marks and similar

Technical Data:

Compatible with: Bona FlexiSand 1.9

No. of discs: 4

Disc diam.: 150 mm

Ø 407 mm

ASK3199942981

4 x Ø 150 mm

1

Tower/Spacer



Extra robust tower which replaces the existing tower on Bona Power Drive Connect.

ASK3199942979

1

Bona Power Drive Connect Sanding Disc



Intermediate disc for mounting velcro abrasive discs.

Ø 150 mm

ASK3199941010

1

4

Bona Power Drive Connect Metal Brush



First step in a brushing sequence, for aggressive brushing.

Ø 150 mm

ASK3199941030

1

4

Bona Power Drive Connect Nylon Brush



Second step in a brushing sequence, smooths the surface and removes scratches.

Ø 150 mm

ASK3199941020

1

4



SANDING | MACHINES

FlexiSand System

Bona ErgoEdge Kit



Bona ErgoEdge, an accessory for the Bona Power Drive Connect that enables you to sand wider and closer to the wall than ever. With 178 mm wide curved discs one can perform 90% of all edge sanding standing upright. Kit includes 4 sanding discs, 4 interface pads and 1 distance wheel (drive plate not included).

Ø 178 mm

ASK3199942977

1

4

Bona Power Drive Connect Diamond Blades



Innovative discs for efficient dry stripping of old care product from resilient floors. Saves up to 60% time in comparison to standard chemical processes. The diamond coated spring metal construction creates good air flow and cool running while maintaining high sanding efficiency, allowing the floor to be sanded dry without clogging.

Ø 150 mm

ASK4099941643

1

4

Bona Diamond Blades Spare blades

Spare blades for the Bona Power Drive Connect Diamond Blades.

ASK4000030634

1

6

Bona Steel Plates set



Bona Steel Plates are essential for achieving perfectly flat floors. They effectively reduce dish-out and chatter during sanding offering superior performance for contractors dedicated to delivering flawless results. Use with Bona Power Drive or Bona Quattro Disc.

Ø 150 mm

AX0003562

1

4

Bona Concrete Disc



Basic drive plate for fitting different types of sanding segments. Magnetic fixing for quick and easy change of segments.

Ø 407 mm

ASO312570

1

Use Bona Box XL for storage and transportation



SANDING | MACHINES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

FlexiSand System

Split Segment



Removal of polyurethane, thin adhesive residues, paint.

ASO312582

1

PCD Maxi Segment



Removal of thick adhesive residues, epoxy and carpet foam.

ASO312581

1

Diamond Segment



Removing sinter layers, preparation of concrete surfaces.

ASO312571

5

Bona FlexiVacuum



Bona FlexiVacuum is a part of Bona dust free sanding solution, for an improved working environment. It is classified in Class M according to EN 60 335-2-69, ensuring that 99,9% of particles are removed by the filters. Can be mounted on Bona FlexiSand.

Key Benefits:

- Healthier working conditions - M Classified, health hazardous dust EN 60335-2-69.
- Electrical power outlet
- LED- alarm light in case of too low air flow

Technical Data:

Weight: 6kg
Collection capacity (bag):
 Approx. 10 litres wood dust
Motor: 800 W, 230 V
Air flow: 171 m³/ hour

ASK3199940901

1

1

FlexiVacuum Filter Dust Bag



Filter dust bag - M Class EN 60 335-2-69

ASO994011

1

5



SANDING | MACHINES

Dust Containment

Article Number

Packaging

Pcs/transport
package

Effect

Bona DCS 70



The Bona DCS 70 is a powerful H-classified vacuum unit for dust-free sanding. Its two-step cyclonic separation and unique filter design effectively contains dust within the machine. Even changing the dust bag can be done completely dust free. With the DCS 70 connected to the sanding machine there is no need to seal off connecting rooms or cover paintings and bookshelves. In addition, it provides a cleaner, healthier working environment, compared to using regular dust bags on the sanding machine.

Key Benefits:

- Dust-free sanding
- Ergonomic design and convenient transportation
- Low power consumption
- Quick and dust free swap of dust bags
- Unique seamless dust bag solution using LongoPac

Technical Data:

Weight: 43 kg
Dimensions: 800 × 600 × 1200 mm
Dust holding capacity: 70 L
Motor power: 230 V- 50–60 Hz, 1,4kW
Airflow with 7.5 m hose: 235 m³ per hour
Coarse filter: Conical folded polyester filter, 1 m²
Fine filter: HEPA class H 13 (99.996%, 0.3 µM), 0.66 m³
Hose aperture: 35 mm diameter
Hose length: 7.5 m including connection adapters

AMO530005

1

1

Dust Bags LongoPac



LongoPac for Bona DCS 70. 20 meters long. Sold in a set of four.

ASO539001

20 m

1

Adapter Kit 1



Adapter Kit for connecting the Bona DCS 70 to non-Bona machines such as Lägler Hummel, Superhummel, Elf and Profit.

ASO539910

1

Adapter Kit 2



Adapter for connecting the Bona DCS 70 to Lägler Flip.

ASO539920

1

Air Adjustment Adapter



A great accessory for the DCS 70 and DCS 25 vacuums when running power tools. Increases the suction and dust pick-up while allowing more airflow to ensure proper motor cooling for the vacuum.

ASO83894951

1

3



SANDING | MACHINES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Dust Containment

Article Number

Packaging

Pcs/transport package

Effect

Bona DCS 50



Powerful & compact vacuum unit intended for both dry and wet cleaning. As part of the Bona Dust-Free sanding solution, DCS 50 collects the fine and hazardous wood dust from all Bona sanding machines.

Key Benefits:

- Dust-free sanding
- For both dry and wet cleaning
- Dust class M
- Power outlet with auto-start function
- Light and handy

Technical Data:


Weight: 19 kg
Dimensions: 640 × 370 × 1045 mm
Dust holding capacity: 50 L
Motor power: 230 V, 50–60 Hz, 1,38 kW
Hose length: 5 m

AM11484430

1

1

Fleece Filter Bag



Fleece Filter bag for DCS 50.

AS3628893540

1

10

Flat pleated filter



Universal flat pleated filter for Bona DCS 50 for both wet and dry vacuuming. Certified for dust classes M and L, with a dust containment efficiency of 99.9 %. The filter is made of PES fiber material and is rot-proof and insensitive to moisture, making it ideal for vacuuming liquids, fine dust and coarse dirt.

AS3628893550

1

10

Bona DCS 25



The Bona DCS 25 is a powerful H-classified vacuum cleaner for dust-free sanding. It can be connected to all Bona sanding machines. It meets the highest requirements for vacuum cleaners within the construction industry today, yet it is easy to transport and bring to site.

Key Benefits:

- Dust-free sanding
- Smaller size for convenient transportation
- Low power consumption
- Electrical outlet with automatic start/stop
- 7,5 m non marking hose

Technical Data:

Weight: 20 kg
Dimensions: 550 × 500 × 1070/830 mm
Dust holding capacity: 25 L
Motor power: 230 V- 50–60 Hz, 1,45 kW
Airflow: 194 m³ per hour

AMO540000

1

1

Fleece Dust Bag



Disposable fleece dust bag for DCS 25.

ASO540001

1

10



SANDING | MACHINES

Edgers

Bona Edge UX



Powerful and easily manoeuvrable edge sander, with new flexibility and safety features. Bona Edge UX is developed from a user-experience perspective, to create a safer working environment for both floor and craftsman. Its scope is phenomenal and, due to the design of the sanding arm, corners and stairs are well within its reach. The new design also minimises the risk of chatter marks, and provides improved visibility through its LED light technology.

Key Benefits:

- Easy to use
- Safety features
- Dust free sanding
- New lighting technology
- Less risk of sanding marks

Technical Data:

Total weight: 15.5 kg
Sanding arm length: 130 mm/220 mm
Disc speed: 3000 rpm

130 mm	AMO230600	230 V / 50Hz		1.25 kW
220 mm	AMO230500	230 V / 50Hz		1.25 kW

Bona CombiEdge



A lightweight and flexible edge sander. Easily switches between a 120 mm short-arm edger or a 330 mm long-arm sander in just a few simple steps. The 330 mm arm provides excellent reach under deep toe kicks and radiators. The lightweight and highly efficient edge-sanding machine is also fitted with a frontal LED light for better visibility. For optimal dust reduction, the Bona CombiEdge is compatible with all Bona DCS machines.

Key Benefits:

- Utilises 6" sanding discs
- Lightweight design delivers greater ease-of-use
- Easily converts from short to long arm as needed with very few operations

Technical Data:

Disc diameter: 150 mm
Total weight: Short arm 7.5 kg; Long arm 8.3 kg
Length sanding arm: 125 / 330 mm
Disc speed: 3300 rpm
Dust discharge: < 2.0 mg/m³

120 mm	AMK280100	230 V / 50 Hz	1	1.15 kW
330 mm	AMK281100	230 V / 50 Hz	1	1.15 kW
120/330 mm	AMK282010	230 V / 50 Hz	1	1.15 kW
120/330 mm	AMK282100	230 V / 50 Hz	1	1.15 kW

Bona DualEdge



Steering sander that is extremely easy to operate due to the counter-rotating 100 mm dual-head discs. The discs deliver forgiving sanding action, stability, high speed and force the dust towards the dust extractor. Bona DualEdge is equipped with a front LED for better illumination of the working area. This revolutionary concept greatly increases working speed. For optimal dust reduction, the Bona DualEdge is compatible with all Bona DCS machines.

Key Benefits:

- Rotating dual head discs
- Gets close to corners
- Lightweight
- Very manoeuvrable

Technical Data:

Disc diameter: 100 mm
Total weight: 9 kg
Length sanding arm: 155 mm
Disc speed: 4500 rpm

155 mm	AMK270000	230 V / 50Hz		1.15 kW
--------	-----------	--------------	--	---------



SANDING | MACHINES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Edgers

Disposable Dust Bag Small



Disposable Dust Bag for edge sanders.

Key Benefits:

- Rip-resistant
- Reduces airborne dust
- Easy to change

ASO992012

10

Bona CombiEdge Stair Support



Attachment to CombiEdge for making sanding of stairs easier by creating stability support.

330 mm

ASK66000030150

1

1

Orbital Sanders

Bona Orbital



Bona Orbital is a precision sander particularly suitable for mid and fine sanding. Its compact dimensions and low weight makes the machine easy to handle and allows you to work longer periods of time without getting tired. The powerful brushless EC motor is characterised by low noise, high efficiency and low maintenance.

Key Benefits:

- Efficient and low-noise sanding
- Easy to operate
- Smart and handy carrying box
- Gentle for your hand and arm
- Mid and fine sanding

Technical Data:

Power: 1400 W 230 V – 50/60 Hz

Speed: 4000-10000 rpm

Disc diameter: 150 mm

Weight: 1,15 kg

Ø 150 mm

AMO300001

1

1

Bona Fusion Pad



Bona Fusion Pad for Bona Orbital or other Orbital Sander with universal thread: with burnished screw 5/16 "UNF and washers. Available in two different hardness classes, medium and hard. Dimensions: Ø 150 mm

Medium

AA69011000

1

1

Hard

AA69012000

1

1



SANDING | MACHINES

Belt Sanders

Bona Belt UX



Bona Belt UX handles challenging flooring jobs with excellence. It offers ergonomic handling, it is easy to transport, and easy to disassemble and reassemble. The belt sander also features a multimeter, and a specially-designed cable and hose holder. Its unique dual-speed pulley system and infinite drum pressure adjustment assure the highest sanding quality for any type of wood. For optimal dust containment, pair it with Bona DCS.

Key Benefits:

- Manoeuvrable handles
- Defined drum pressure
- Less vibration
- Easy fitting and change of abrasive

Technical Data:

Drum width: 200 mm
Sanding belt size: 200 x 750 mm
Motor power: 2.2/4.0 kW
Total weight: 85 kg
Drum revolutions: 1850/2050 rpm

200 mm

AMK173100

230 V / 50 Hz

1

2,2 kW

Transport Cart



Transport cart that simplifies transportation of the Bona Belt UX and protects the machine wheels from damage.

ASK6999940006

1

Bona CEE Adapter



Enables the Bona Belt and the Bona DCS 70 to be used with a regular 230 V cable.

ASO903670

1

External Soft Start



External soft-start unit for reducing the potential for fuse breakage. For machines without built in soft- or easy-start systems. Maximum load: 3500 W.

ASO903680

1



SANDING | MACHINES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Belt Sanders

Bona Belt



Powerful belt sander with compact design for easy manoeuvring and handling. The Bona Belt takes on any wood floor and with its soft-start motor, only a 10 Amp fuse is needed for it to run. All adjustments can be made from the top of the machine and the sanding drum is easily changed to another width if needed. The unique drum construction makes changing abrasive belts a job done in seconds. Bona Belt has a highly efficient vacuum unit that minimises dust. For optimal dust reduction, connect it to Bona DCS 70.

Key Benefits:

- Powerful wood floor sander
- Ergonomic design with convenient lifting and lowering of the sanding drum
- Disassembles easily for easier transportation
- Easy-start motor

Technical Data:

Drum width: 200 & 250 mm
Sanding belt size: 200 x 750 mm alt. 250 x 750 mm
Motor power: 1-phase Europe/Asia 2.2 kW
Total weight: 74 kg
Dust discharge: < 2 mg/m³ air

250 mm	AMO110000.3	230 V / 50 Hz	1	2.2 kW
200 mm	AMO110001.3	230 V / 50 Hz	1	2.2 kW

Extra Weight



An extra 7 kilos for the Bona Belt for increased stability and sanding performance.

7 kg	ASO991110		1	
------	-----------	--	---	--

Transport Cart



Transport cart that simplifies transportation of the Bona Belt and protects the machine wheels from damage.

ASO995022			1	
-----------	--	--	---	--

Bona Belt Lite



The Bona Belt Lite is a compact belt sander able to do great jobs for its size. Designed to provide the perfect combination of efficiency, power and agility. It can be easily disassembled into three parts, and quickly reassembled in a few simple steps. For optimal dust reduction, the Bona Belt Lite is compatible with Bona DCS 70.

Key Benefits:

- Optimal balance between weight and drum pressure
- Superior manoeuvrability
- Easy fitting and changing of abrasive

Technical Data:

Drum width: 200 mm
Sanding belt size: 200 x 750 mm
Motor power: 2.2 kW
Total weight: 60 kg
Drum revolutions: 2400 rpm

200 mm	AMK175000	230 V / 50 Hz	1	2.2 kW
--------	-----------	---------------	---	--------



SANDING | MACHINES

Drum Sanders

Bona Capricorn



For sanding of all kinds of wood and parquet floors by users of all proficiency levels: professionals, semi-professionals or DIY users

Key Benefits:

- Compact, yet effective
- "Dead man" electrical safety feature on handle
- Easy fitting and changing of paper sleeve, no tools needed
- Step-less pressure adjustment

Technical Data:

Drum width: 200 mm
Sanding belt size: 200 x 551 mm
Motor power: 2.2 kW
Total weight: 94.2 kg
Drum Revolutions: 2560 rpm

200 mm

AMO190000

230 V / 50 Hz

1

2.2 kW

Bona Scorpion



Expansion drum sanding machine designed to be a lightweight professional tool that can be easily and very safely operated by any user. Unique electrical power supply safety features such as the "dead man's grip" handle guarantee safe operation. Bona Scorpion is the perfect combination of functionality, reliability, safety and ease of use.

Key Benefits:

- Compact yet effective
- Forgiving sanding
- Lightweight - only 45 kg
- Easy change of abrasive

Technical Data:

Drum width: 200 mm
Sanding belt size: 200 x 480 mm
Motor power: 1.15 kW
Total weight: 45 kg
Drum revolutions: 3300 rpm

200 mm

AMK180000

230 V / 50 Hz

1

1.5 kW

Disposable Dust Bag Large



Disposable Dust Bag for belt and expansion sanders.

Key Benefits:

- Rip-resistant
- Reduces airborne dust
- Easy to change

ASO991012

10



SANDING | MACHINES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Drum Sanders

Bona Scorpion DCS



Delivering the same performance and ease of operation as the Bona Scorpion, the DCS version comes with the attached Dust Care System which operates on an independent switch, and it can also be connected to other machines. Bona Scorpion DCS is the perfect combination of functionality, reliability, safety, ease of use and dust-free sanding.

Key Benefits:

- Compact yet effective
- Comes with DCS
- Forgiving sanding
- Lightweight - only 47 kg

Technical Data:

Drum width: 200 mm
Sanding belt size: 200 x 480 mm
Motor power: 1.3 kW + 1.2 kW (vacuum unit)
Total weight: 47 kg
Drum revolutions: 3000 rpm

200 mm	AMK185000	230 V / 50 Hz	1	1.3 kW
--------	-----------	---------------	---	--------

Disposable Dust Bag Large



Disposable Dust Bag for Scorpion DCS.

Key Benefits:

- Rip-resistant
- Reduces airborne dust
- Easy to change

ASO993011			1	
-----------	--	--	---	--

Distressing Drums

Tynex Distressing Drum



Distressing drums for Belt Sanders. Tynex for fine brushing.

195 mm	ASK6099940046	Bona Belt HD	1	
195 mm	ASK2999940046	Bona Scorpion	1	

Metal Distressing Drum



Distressing drums for Belt Sanders. Metal for rough brushing.

195 mm	ASK6099940045	Bona Belt HD	1	
195 mm	ASK2999940045	Bona Scorpion	1	



SANDING | MACHINES

Buffers

Bona Buffer



Buffing machine for a wide range of applications including fine wood sanding, cutting back grain raise, cleaning etc. Its reliable and asymmetrically placed 1600W motor ensures steady and stable operation. Simple construction and easy to use with fully adjustable handle height and large transportation wheels. Comes without drive plate.

Technical Data:

Motor type: 1.6 kW, 1 phase, 230V/50Hz

Abrasive disc speed: 120 rpm

Total weight: 33 kg

Ø 407 mm	AMC739000B	220-240 V / 50 Hz	1	1.6kW
----------	------------	----------------------	---	-------

Extra Weight



To be mounted on Bona Buffer for extra pressure.

5.7 kg	ASC3611478		1	
--------	------------	--	---	--

Bona Mini Buffer



Single-speed buffing machine for basic buffing and superficial sanding of finished surfaces. Smooth running and features an anti-vibration system for ease of use. The handle can be lowered for use under stairs and tables.

Technical Data:

Weight: 13 kg

Ø 300 mm	AMC718010	240 V / 50-60 Hz	1	290 W
----------	-----------	---------------------	---	-------

Drive Disc



Drive disc for Bona Mini Buffer.

Ø 300 mm	ASC718070		1	
----------	-----------	--	---	--

Bona Mini Buffer Microfiber Pad



Microfibre pad

ASC718906	Ø 300 mm	1		
-----------	----------	---	--	--



SANDING | MACHINES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Buffers

Vacuum Sealing Ring




Dust skirt for Bona Buffer for effective dust containment.

Ø 407 mm

ASC74765

1

Dust Bag – Paper



Disposable paper dust bag for the Bona Buffer vacuum unit.

ASC25430

1

Dust Bag – Cloth



Reusable cloth filter bag for the Bona Buffer vacuum unit.

ASC025435

1

Drive Disc



With grip hooks for driving pads for the Bona Buffer unit.

Ø 407 mm

ASC742069

1

Sanding Disc



Sanding disc for attaching double-sided abrasive discs on the Bona Buffer unit.

Ø 407 mm

ASC742077

1

Quattro Disc



Four-plate sanding disc for Bona Buffer.

Ø 407 mm

ASC742080

4 x Ø 150 mm

1



SANDING | MACHINES

Other Machines

Power Stripper



Can be operated either by hand or as a floor stripper with extension handle. Easy operation by the use of a foot switch. Adjustable hand-grips for easy fit. For removing bonded floor coverings of foam, textile, parquet, semi-flexible tiles or PVC.

Technical Data:

Working width: 210 mm

Power: 2.0 kW

Oscillations: 6500 U/min

Weight: 12.8 kg

Noise level: 85 dB (A)

AM43021000

1

ACCESSORIES



Spare Blade
210x60x1 mm

AS111080001

6

Fein MultiMaster saw blades

Saw blades and accessories for Fein MultiMaster.



AS440080014

AS440080015

65 mm, E-cut
precisions

AS44008014

2

35 mm, E-cut

AS44008015

1

80 mm, E-cut

AS44008003

1



SANDING | MACHINES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Storage & Transportation

Article Number

Packaging

Pcs/transport
package

Package/
pallet

Bona Box L



Hard-plastic container for storing Bona FlexiSand accessories such as drive plates and sanding discs. Dimensions: 230 x 396 x 296 mm.

AST237

1

1

Bona Box XL



Hard-plastic container for storing Bona FlexiSand accessories such as drive plates and sanding discs. Dimensions: 430 x 396 x 296 mm.

AST437

1

1

Bona Box Trolley



Trolley with large wheels for easy transportation of Bona Boxes.

AST999

1

1



SANDING | MACHINES

Service Kit

Type

Article Number

Packaging

Spare parts included

Bona Service Kit FlexiSand



To make life easy, you can now perform basic service by yourself on a regular basis. Based on experience on what requires attention, Bona has put together service kits with the most common spare parts for Bona FlexiSand as well as clear instructions for easy replacement.

Kit includes:

- Complete suction pipe
- Dusttube clip incl. screws
- Dust skirt
- Gas spring
- Rubber bumper
- Rubber bumper adhesive
- Velcrostrip + screws

Bona FlexiSand

ASK3199949000

1

7

Bona Service Kit Belt UX



To make life easy, you can now perform basic service by yourself on a regular basis. Based on experience on what requires attention, Bona has put together service kits with the most common spare parts for Bona Belt UX as well as clear instructions for easy replacement.

Kit includes:

- Cable holder
- Disposable dustbag, Large
- Drive belt drum XL
- Drive belt L

Bona Belt UX

ASK2099949001

1

4

Bona Service Kit Belt HD



To make life easy, you can now perform basic service by yourself on a regular basis. Based on experience on what requires attention, Bona has put together service kits with the most common spare parts for Bona Belt HD as well as clear instructions for easy replacement.

Kit includes:

- Cable holder
- Caster rubber back wheel
- Caster rubber side wheel
- Disposable dustbag, Large
- Drive belt drum XL
- Drive belt L

Bona Belt HD

ASK2099949000

1

6

Bona Service Kit Belt



To make life easy, you can now perform basic service by yourself on a regular basis. Based on experience on what requires attention, Bona has put together service kits with the most common spare parts for Bona Belt as well as clear instructions for easy replacement.

Kit includes:

- Hinge for sidecover
- Arbor wrench
- Poly-V belt L
- Poly-V belt XL (Drum)
- Disposable dustbag, Large
- Cable holder

Bona Belt

ASK1199949000

1

6



SANDING | MACHINES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Service Kit

Type

Article Number

Packaging

Spare parts included

Bona Service Kit Edge UX 130 mm



To make life easy, you can now perform basic service by yourself on a regular basis. Based on experience on what requires attention, Bona has put together service kits with the most common spare parts for Bona Edge UX as well as clear instructions for easy replacement.

Kit includes:

- Cogged belt 130 mm
- Pulley
- Velcro disc
- Wheel
- Disposable dustbag, Large
- Cable holder

Bona Edge UX 130 mm

ASK7299949000

1

6

Bona Service Kit Edge UX 220 mm



To make life easy, you can now perform basic service by yourself on a regular basis. Based on experience on what requires attention, Bona has put together service kits with the most common spare parts for Bona Edge UX as well as clear instructions for easy replacement.

Kit includes:

- Cogged belt 220 mm
- Pulley
- Velcro disc
- Wheel
- Disposable dustbag, Large
- Cable holder

Bona Edge UX 220 mm

ASK7299949001

1

6

Bona Service Kit CombiEdge



To make life easy, you can now perform basic service by yourself on a regular basis. Based on experience on what requires attention, Bona has put together service kits with the most common spare parts for Bona CombiEdge as well as clear instructions for easy replacement.

Kit includes:

- Carbon brush
- Extention cable orange
- Belt short
- Belt long
- Velcro disc
- Disposable dustbag, Small

Bona CombiEdge

ASK6699949000

1

6

Bona Service Kit Edge XL



To make life easy, you can now perform basic service by yourself on a regular basis. Based on experience on what requires attention, Bona has put together service kits with the most common spare parts for Bona Edge XL as well as clear instructions for easy replacement.

Kit includes:

- Velcro disc 178mm
- Wheel complete
- Carbon brush
- Extention cable orange
- Cogged belt 220 mm
- Disposable dustbag, Small

Bona Edge U

ASK2399949000

1

6



SANDING | ABRASIVES

Superior – Ceramic Mix

Dimension

Grit

Article Number

Packaging

Pcs/transport package

Bona 8700 are superior abrasives made with ceramic grit for the easy removal of hard lacquers, carpet residue and for flattening highly uneven timber. Together with the smoother Bona 8300 Series, it creates an optimal system for high sanding performance combined with an excellent surface finish. The ceramic Aluminium oxide grit used on the abrasives are close to diamonds in hardness ensuring extremely long-lasting abrasives with maintained aggressiveness. Polyester cloth backing for outstanding strength and dimensional stability. Discs have Velcro backing for simple fitting of abrasives.

Key Benefits:

- Developed exclusively for wood floors
- For heavy-duty sanding applications
- Superior durability
- Extreme aggression

Bona 8700 Belt




200 x 750 mm	Grit 36	AAS469500363	1	5
200 x 750 mm	Grit 50	AAS469500503	1	5
250 x 750 mm	Grit 36	AAS469600363	1	5
250 x 750 mm	Grit 50	AAS469600503	1	5

Bona 8700 Roll



203 mm x 10 m	Grit 50	AAS470700501	1	1
254 mm x 10 m	Grit 50	AAS470800501	1	1
305 mm x 10 m	Grit 50	AAS470900501	1	1

Bona 8700 Ceramic Disc

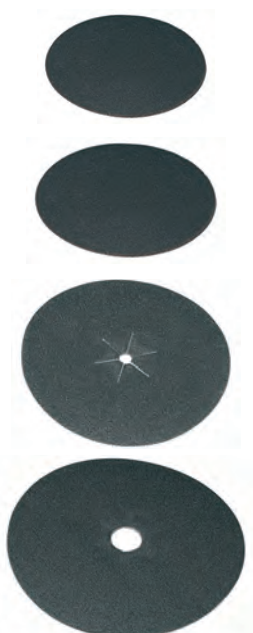

Ø 100 mm	Grit 36	AAS472800365	1	25
Ø 100 mm	Grit 50	AAS472800505	1	25
Ø 125 mm	Grit 36	AAS471600365	1	25
Ø 125 mm	Grit 50	AAS471600505	1	25
Ø 150 mm	Grit 36	AAS471700365	1	25
Ø 150 mm	Grit 50	AAS471700505	1	25
Ø 178 mm	Grit 36	AAS471800365	1	25
Ø 178 mm	Grit 50	AAS471800505	1	25



SANDING | ABRASIVES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Superior — Green Ceramic

Dimension

Grit

Article Number

Packaging


Pcs/transport package

Bona Green Ceramic Abrasives are comprised of a combination of ceramic and aluminum oxide grit materials, making them extremely aggressive, offering outstanding productivity. Compared to other competitive ceramic abrasives, Bona Green Ceramic Abrasives cut 30% faster and last up to 50% longer.

Key Benefits:

- Cuts 30% faster than any other competitive abrasive
- Lasts up to 50% longer than any other competitive ceramic abrasive

Bona 8600 Green Ceramic Belt



200 mm x 750 mm	Grit 36	AAS860700363	1	5
200 mm x 750 mm	Grit 50	AAS860700503	1	10
200 mm x 750 mm	Grit 60	AAS860700603	1	10
200 mm x 750 mm	Grit 80	AAS860700803	1	10
200 mm x 750 mm	Grit 100	AAS860701003	1	10
200 mm x 750 mm	Grit 120	AAS860701203	1	10
250 mm x 750 mm	Grit 36	AAS860800363	1	10
250 mm x 750 mm	Grit 50	AAS860800503	1	10
250 mm x 750 mm	Grit 80	AAS860800803	1	10
250 mm x 750 mm	Grit 100	AAS860801003	1	10
250 mm x 750 mm	Grit 120	AAS860801203	1	10

Bona 8600 Green Ceramic Disc



Ø 150 mm	Grit 36	AAS860300365	1	25
Ø 150 mm	Grit 50	AAS860300506	1	25
Ø 150 mm	Grit 60	AAS860300606	1	25
Ø 150 mm	Grit 80	AAS860300806	1	50
Ø 150 mm	Grit 100	AAS860301006	1	50
Ø 150 mm	Grit 120	AAS860301206	1	50
Ø 178 mm	Grit 36	AAS860400365	1	25
Ø 178 mm	Grit 50	AAS860400506	1	25
Ø 178 mm	Grit 60	AAS860400606	1	25
Ø 178 mm	Grit 80	AAS860400806	1	25
Ø 178 mm	Grit 100	AAS860401006	1	25
Ø 178 mm	Grit 120	AAS860401206	1	25



SANDING | ABRASIVES

Premium — Zircon Mix

Dimension

Grit

Article Number

Packaging

Pcs/transport package

Premium abrasive made of an optimal blend of zirconium and silicon carbide for a perfect balance between aggressiveness and surface finish. The Bona 8300 abrasives are of very high durability and have an antistatic coating which impedes clogging and ensures cooler and longer runtime as well as better dust extraction. The character of the grit material is such that new sharp points are created during use, ensuring maintained aggressiveness throughout its lifetime. Lasts up to five times longer than conventional Aluminium oxide abrasives. Discs have Velcro backing for simple fitting of abrasives.

Key Benefits:

- Unique composition developed exclusively for wooden floors
- Antistatic properties for minimised clogging and optimal dust extraction
- Very high durability
- High heat resistance

**Bona 8300
Antistatic Belt**



200 x 750 mm	Grit 24	AAS467700243	1	10
200 x 750 mm	Grit 36	AAS467700363	1	10
200 x 750 mm	Grit 40	AAS467700403	1	10
200 x 750 mm	Grit 60	AAS467700603	1	10
200 x 750 mm	Grit 80	AAS467700803	1	10
200 x 750 mm	Grit 100	AAS467701003	1	10
200 x 750 mm	Grit 120	AAS467701203	1	10
200 x 750 mm	Grit 150	AAS467701503	1	10
250 x 750 mm	Grit 24	AAS467800243	1	10
250 x 750 mm	Grit 36	AAS467800363	1	10
250 x 750 mm	Grit 40	AAS467800403	1	10
250 x 750 mm	Grit 60	AAS467800603	1	10
250 x 750 mm	Grit 80	AAS467800803	1	10
250 x 750 mm	Grit 100	AAS467801003	1	10
250 x 750 mm	Grit 120	AAS467801203	1	10

**Bona 8300
Antistatic Sleeve**



200 x 551 mm	Grit 24	AAS467600243	1	10
200 x 551 mm	Grit 36	AAS467600363	1	10
200 x 551 mm	Grit 40	AAS467600403	1	10
200 x 551 mm	Grit 60	AAS467600603	1	10
200 x 551 mm	Grit 80	AAS467600803	1	10
200 x 551 mm	Grit 100	AAS467601003	1	10
200 x 551 mm	Grit 120	AAS467601203	1	10



SANDING | ABRASIVES

Premium — Zircon Mix

Bona 8300
Antistatic Roll



Dimension	Grit	Article Number	Packaging	Pcs/transport package
203 mm x 25 m	Grit 36	AAS466300361	1	1
203 mm x 25 m	Grit 60	AAS466300601	1	1
203 mm x 25 m	Grit 100	AAS466301001	1	1
254 mm x 25 m	Grit 36	AAS466400361	1	1
254 mm x 25 m	Grit 60	AAS466400601	1	1
254 mm x 25 m	Grit 100	AAS466401001	1	1

FASTENING

SANDING


COATINGS

FLOOR CARE

ACCESSORIES

Bona around the world

THE LODGE BAR, QUEENSTOWN, NEW ZEALAND

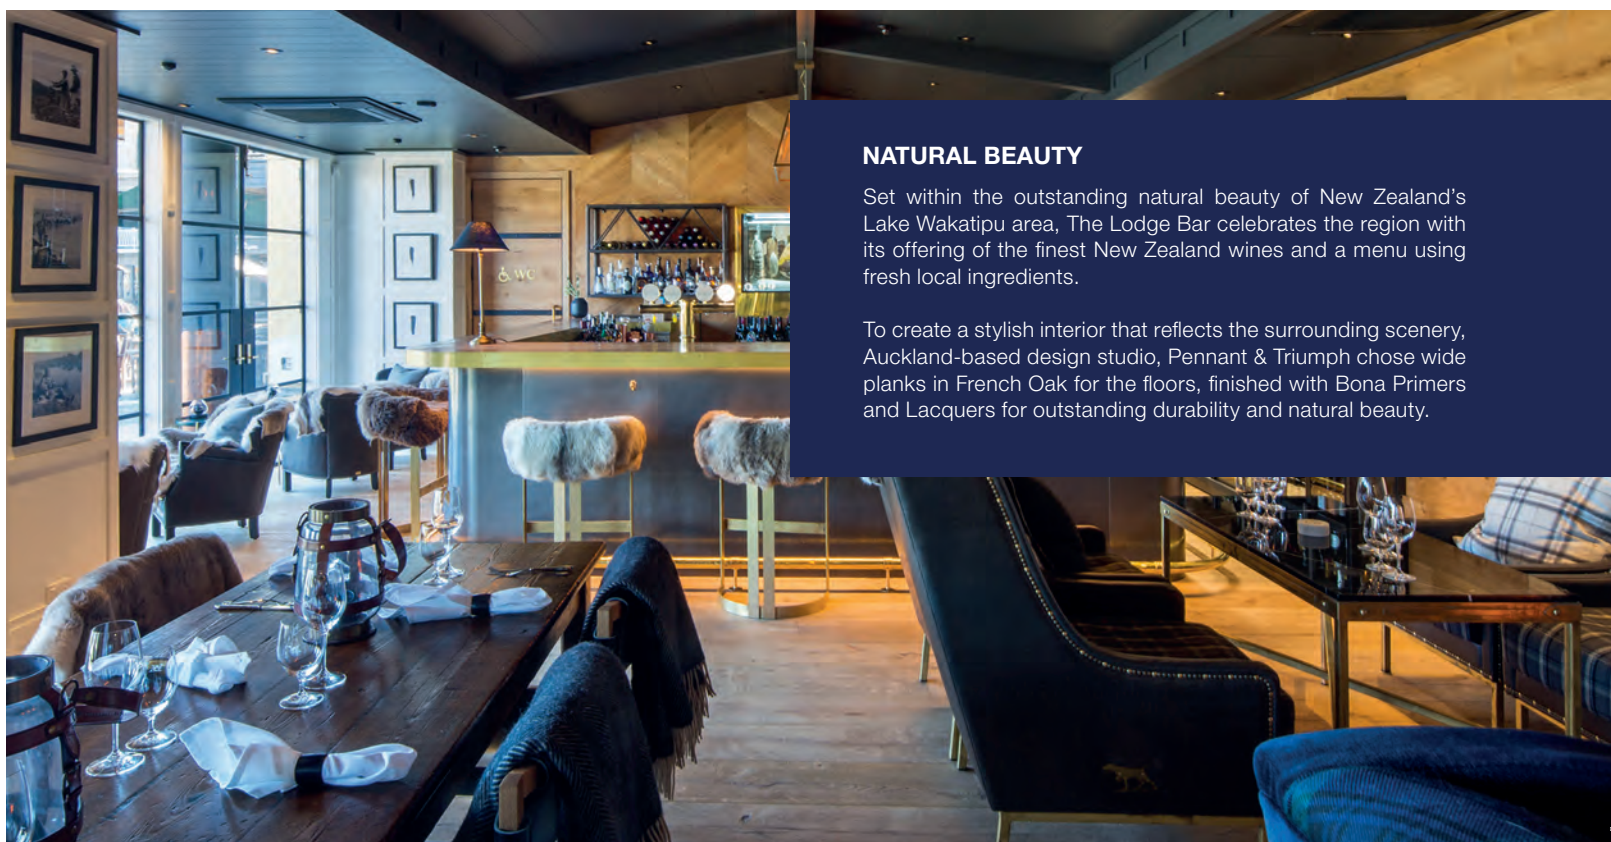

NATURAL BEAUTY

Set within the outstanding natural beauty of New Zealand's Lake Wakatipu area, The Lodge Bar celebrates the region with its offering of the finest New Zealand wines and a menu using fresh local ingredients.




To create a stylish interior that reflects the surrounding scenery, Auckland-based design studio, Pennant & Triumph chose wide planks in French Oak for the floors, finished with Bona Primers and Lacquers for outstanding durability and natural beauty.



SANDING | ABRASIVES

Premium – Zircon Mix

Bona 8300
Antistatic Disc



Dimension	Grit	Article Number	Packaging	Pcs/transport package
Ø 100 mm	Grit 36	AAS472700365	1	25
Ø 100 mm	Grit 60	AAS472700606	1	50
Ø 100 mm	Grit 80	AAS472700806	1	50
Ø 100 mm	Grit 100	AAS472701006	1	50
Ø 100 mm	Grit 120	AAS472701206	1	50
Ø 125 mm	Grit 60	AAS471200606	1	50
Ø 125 mm	Grit 80	AAS471200806	1	50
Ø 125 mm	Grit 100	AAS471201006	1	50
Ø 125 mm	Grit 120	AAS471201206	1	50
Ø 150 mm	Grit 24	AAS467500245	1	25
Ø 150 mm	Grit 36	AAS467500365	1	25
Ø 150 mm	Grit 40	AAS467500406	1	50
Ø 150 mm	Grit 60	AAS467500606	1	50
Ø 150 mm	Grit 80	AAS467500806	1	50
Ø 150 mm	Grit 100	AAS467501006	1	50
Ø 150 mm	Grit 120	AAS467501206	1	50
Ø 150 mm	Grit 24	AAS470600245	1	25
Ø 150 mm	Grit 36	AAS470600365	1	25
Ø 150 mm	Grit 40	AAS470600406	1	50
Ø 150 mm	Grit 60	AAS470600606	1	50
Ø 150 mm	Grit 80	AAS470600806	1	50
Ø 150 mm	Grit 100	AAS470601006	1	50
Ø 150 mm	Grit 120	AAS470601206	1	50
Ø 178 mm	Grit 24	AAS467400245	1	25
Ø 178 mm	Grit 36	AAS467400365	1	25
Ø 178 mm	Grit 40	AAS467400406	1	50
Ø 178 mm	Grit 60	AAS467400606	1	50
Ø 178 mm	Grit 80	AAS467400806	1	50
Ø 178 mm	Grit 100	AAS467401006	1	50
Ø 178 mm	Grit 120	AAS467401206	1	50
Ø 200 mm	Grit 24	AAS471100245	1	25
Ø 200 mm	Grit 36	AAS471100365	1	25
Ø 200 mm	Grit 40	AAS471100406	1	50
Ø 200 mm	Grit 60	AAS471100606	1	50
Ø 200 mm	Grit 80	AAS471100806	1	50
Ø 200 mm	Grit 100	AAS471101006	1	50
Ø 200 mm	Grit 120	AAS471101206	1	50



SANDING | ABRASIVES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Standard — Aluminium Oxide

Dimension

Grit

Article Number

Packaging

Pcs/transport package

Standard abrasive belts of Aluminium oxide which produces a very fine surface finish. Strong cotton backing for high durability and dimensional stability. Compared to conventional Aluminium oxide abrasives, the Bona 8500 Series stands out as a highly durable and good-value alternative.

Key Benefits:


- Exceptional surface finish
- Open coat for cooler sanding
- High durability

Bona 8500 Aluminium Oxide Belt



200 mm x 750 mm	Grit 36	AAS468000363	1	10
200 mm x 750 mm	Grit 40	AAS468000403	1	10
200 mm x 750 mm	Grit 50	AAS468000503	1	10
200 mm x 750 mm	Grit 60	AAS468000603	1	10
200 mm x 750 mm	Grit 80	AAS468000803	1	10
200 mm x 750 mm	Grit 100	AAS468001003	1	10
200 mm x 750 mm	Grit 120	AAS468001203	1	10
250 mm x 750 mm	Grit 40	AAS468200403	1	10
250 mm x 750 mm	Grit 60	AAS468200603	1	10
250 mm x 750 mm	Grit 80	AAS468200803	1	10
250 mm x 750 mm	Grit 120	AAS468201203	1	10

Bona 8500 Aluminium Oxide Sleeve



200 mm x 551 mm	Grit 36	AAS467900363	1	10
200 mm x 551 mm	Grit 40	AAS467900403	1	10
200 mm x 551 mm	Grit 50	AAS467900503	1	10
200 mm x 551 mm	Grit 60	AAS467900603	1	10
200 mm x 551 mm	Grit 80	AAS467900803	1	10
200 mm x 551 mm	Grit 100	AAS467901003	1	10
200 mm x 551 mm	Grit 120	AAS467901203	1	10



SANDING | ABRASIVES


Standard — Silicon Carbide

Standard abrasives of silicon carbide, also known as carborundum, a very hard mineral that creates new sharp points when worn ensuring maintained aggressiveness during its lifetime. This property and an open coat ensures cool running on high speed machines such as edge sanders.

Key Benefits:

- Maintained aggression when worn
- Open coat for cool sanding
- High durability

Bona 8100 Silicon Carbide Disc



Dimension	Grit	Article Number	Packaging	Pcs/transport package
Ø 100 mm	Grit 36	AAS472600365	1	25
Ø 100 mm	Grit 60	AAS472600606	1	50
Ø 100 mm	Grit 80	AAS472600806	1	50
Ø 100 mm	Grit 100	AAS472601006	1	50
Ø 100 mm	Grit 120	AAS472601206	1	50
Ø 150 mm	Grit 16	AAS466900165	1	25
Ø 150 mm	Grit 24	AAS466900245	1	25
Ø 150 mm	Grit 36	AAS466900365	1	25
Ø 150 mm	Grit 40	AAS466900406	1	50
Ø 150 mm	Grit 50	AAS466900506	1	50
Ø 150 mm	Grit 60	AAS466900606	1	50
Ø 150 mm	Grit 80	AAS466900806	1	50
Ø 150 mm	Grit 100	AAS466901006	1	50
Ø 150 mm	Grit 120	AAS466901206	1	50
Ø 150 mm	Grit 150	AAS466901506	1	50
Ø 150 mm	Grit 36	AAS468400365	1	25
Ø 150 mm	Grit 40	AAS468400406	1	50
Ø 150 mm	Grit 50	AAS468400506	1	50
Ø 150 mm	Grit 60	AAS468400606	1	50
Ø 150 mm	Grit 80	AAS468400806	1	50
Ø 150 mm	Grit 100	AAS468401006	1	50
Ø 150 mm	Grit 120	AAS468401206	1	50
Ø 178 mm	Grit 16	AAS467100165	1	25
Ø 178 mm	Grit 24	AAS467100245	1	25
Ø 178 mm	Grit 36	AAS467100365	1	25
Ø 178 mm	Grit 40	AAS467100406	1	50
Ø 178 mm	Grit 50	AAS467100506	1	50
Ø 178 mm	Grit 60	AAS467100606	1	50
Ø 178 mm	Grit 80	AAS467100806	1	50
Ø 178 mm	Grit 100	AAS467101006	1	50
Ø 178 mm	Grit 120	AAS467101206	1	50



SANDING | ABRASIVES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Standard — Silicon Carbide

Bona 8100
Silicone Carbide Disc



Dimension	Grit	Article Number	Packaging	Pcs/transport package
Ø 200 mm	Grit 16	AAS466600165	1	25
Ø 200 mm	Grit 24	AAS466600245	1	25
Ø 200 mm	Grit 36	AAS466600365	1	25
Ø 200 mm	Grit 40	AAS466600406	1	50
Ø 200 mm	Grit 50	AAS466600506	1	50
Ø 200 mm	Grit 60	AAS466600606	1	50
Ø 200 mm	Grit 80	AAS466600806	1	50
Ø 200 mm	Grit 100	AAS466601006	1	50
Ø 200 mm	Grit 120	AAS466601206	1	50
Ø 200 mm	Grit 150	AAS466601506	1	50

Bona 8100
Double-sided Disc



Ø 407 mm	Grit 16	AAS466800163	1	10
Ø 407 mm	Grit 24	AAS466800243	1	10
Ø 407 mm	Grit 36	AAS466800363	1	10
Ø 407 mm	Grit 40	AAS466800403	1	10
Ø 407 mm	Grit 60	AAS466800603	1	10
Ø 407 mm	Grit 80	AAS466800803	1	10
Ø 407 mm	Grit 100	AAS466801003	1	10
Ø 407 mm	Grit 120	AAS466801203	1	10



SANDING | ABRASIVES

Pads

Type

Article Number

Dimensions

Pcs/transport package

Colour coding for field of use

Smooth



Rough

White – backing for sanding screen. Can also be used for buffing polish.

Tan (beige) – for polishing

Red – for daily cleaning

Green – for periodic cleaning and oil maintenance

Brown – for oil application

Black – for heavy duty cleaning and polish stripping

Pads

Type

Article Number

Dimensions

Pcs/transport package

Bona Superpad 407 mm



Thick pad for Bona FlexiSand and Bona Buffer.

White	AAS867300058	Ø 407 mm x 25 mm	5
Tan	AAS867300038	Ø 407 mm x 25 mm	5
Red	AAS867300048	Ø 407 mm x 25 mm	5
Green	AAS867300028	Ø 407 mm x 25 mm	5
Brown	AAS867300068	Ø 407 mm x 25 mm	5
Black	AAS867300018	Ø 407 mm x 25 mm	5

Bona Superpad 280 mm



Pad for Bona Mini Buffer.

White	AA68041000	Ø 280 mm x 25 mm	5
Tan	AA68042000	Ø 280 mm x 25 mm	5
Red	AA68043000	Ø 280 mm x 25 mm	5

Bona Superpad 407 mm

Incl. EAN code



Thick pad for Bona FlexiSand and Bona Buffer.

White	AAS68011000	Ø 407 mm x 25 mm	5
Tan	AAS68012000	Ø 407 mm x 25 mm	5
Green	AAS68013000	Ø 407 mm x 25 mm	5
Black	AAS68014000	Ø 407 mm x 25 mm	5

Bona Pad 407 mm



Thin pad for Bona FlexiSand and Bona Buffer.

White	AA68001000	Ø 407 mm x 8 mm	10
Tan	AA68002000	Ø 407 mm x 8 mm	10
Green	AA68003000	Ø 407 mm x 8 mm	10
Black	AA68004000	Ø 407 mm x 8 mm	10
Red	AA68005000	Ø 407 mm x 8 mm	10



SANDING | ABRASIVES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Pads

Bona Superpad 200 mm



Pad for Lägler Trio.

Type	Article Number	Dimensions	Pcs/transport package
White	AA68053000	Ø 200 mm x 8 mm	
Green	AA68054000	Ø 200 mm x 8 mm	

Bona Woolpad



Pad for Bona FlexiSand and Bona Buffer. The pad is made of genuine sheep's wool for application of oil and polishing of oiled or waxed floors. Wool produces higher heat towards the surface compared to synthetic pads, which improves the penetration of oil into the wood and accelerates the drying process. Contains natural lanolin (wool wax) for a satin finish. Highly recommended for Bona Oils.

Key Benefits:

- Produces high heat, for improved oil penetration
- Dimensionally stable and long-lasting
- Holds the oil below the pad - no splashing

Technical Data:

Material: 100% wool

AA68071000	Ø 410 mm x 5 mm	10
------------	-----------------	----

Bona Fiber Pad



Premium double sided sanding pad developed for aggressive cleaning and polish removal but also useful for light brushing of wooden floors.

AA32153016	Ø 407 mm	1
------------	----------	---

Bona Fiber Pad Velcro Backing



Fiber pad with velcro backing for aggressive cleaning and polish removal.

AA32153180	Ø 180 mm	1
AA32153150	Ø 150 mm	1

Scrad Pads

Bona Scrad Pad



Abrasive pad for Bona FlexiSand and Bona Buffer. Used together with a Bona Scrad Wing it forms a unique abrasive system developed for cutting back grain raise between coats of finish. Minimises scratches.

Ø 407 mm x 8 mm	Grit 320	AAS854303208		5
-----------------	----------	--------------	--	---



SANDING | ABRASIVES

Scrad Pads

Dimension

Grit

Article Number

Packaging

Pcs/transport package

Bona Scrad Wing

Delta shaped abrasive with Velcro backing for use together with the Bona Scrad Pad. Attach 1-2 wings.



Delta	Grit 120	AAS468601206		50
Delta	Grit 150	AAS468601506		50
Delta	Grit 220	AAS468602206		50

Screens

Dimension

Grit

Article Number

Packaging


Pcs/transport package

Abrasive screen for surface preparation of wood floors prior to coating and for cutting back grain raise after coating. High durability and low grit loss. Its open mesh structure impedes clogging and improves dust extraction.

Key Benefits:

- Non-Clogging
- Open mesh structure for improved dust extraction
- Double-Sided

Bona Sanding Screen, double-sided

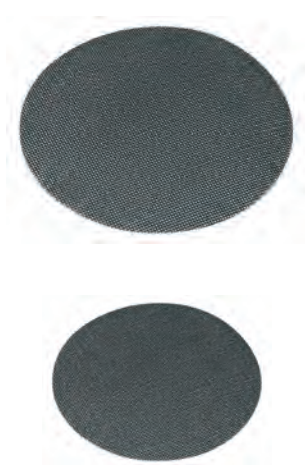

Ø 407 mm	Grit 60	AAS867100603	1	10
Ø 407 mm	Grit 80	AAS867100803	1	10
Ø 407 mm	Grit 100	AAS867101003	1	10
Ø 407 mm	Grit 120	AAS867101203	1	10
Ø 407 mm	Grit 150	AAS867101503	1	10
Ø 407 mm	Grit 180	AAS867101803	1	10
Ø 407 mm	Grit 220	AAS867102203	1	10
Ø 407 mm	Grit 60	AAS67012060 *	1	10
Ø 407 mm	Grit 80	AAS67012080 *	1	10
Ø 407 mm	Grit 100	AAS67012100 *	1	10
Ø 407 mm	Grit 120	AAS67012120 *	1	10
Ø 200 mm	Grit 120	AAS903701208	1	30

* Marked with EAN label



SANDING | ABRASIVES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Diamond Abrasives

Dimension

Grit

Article Number

Packaging

Pcs/transport package

Bona Diamond Abrasive Disc



Made using the hardest sanding agents in the world, Bona Diamond Abrasives are unique, delivering unparalleled sanding efficiency, durability and surface smoothness – whether sanding on bare wood or in preparation for recoating. Because the diamond grits are hard but not sharp, the result after fine sanding is a smooth, virtually scratch-free surface.

Bona Diamond Abrasives last up to 12 times longer than conventional screens and deliver consistent performance, even after 100 m² of sanding. And thanks to its unmatched hardness, each disc maintains its sanding performance throughout its lifetime.

Key Benefits:

- Longer lasting
- Perfect evenness
- Better surface
- Safe recoating

Ø 150 mm	Grit 80	AAS472000808	1	8
Ø 150 mm	Grit 120	AAS472001208	1	8
Ø 125 mm	Grit 240	AAS471902408	1	12
Ø 150 mm	Grit 240	AAS472002408	1	8

Bona Intermediate Pad



A pressure-equalising foam pad that has the ability to follow the contours of the surface.

Ø 125 mm		AAS472102408	1	3
Ø 150 mm		AAS472200008	1	4

Abrasives - Delta

Dimension

Grit

Article Number

Packaging

Pcs/transport package

Delta Abrasive Paper



For Fein and Bosch.

82 x 82 x 82	Grit 40	AAS872100406	1	50
82 x 82 x 82	Grit 60	AAS872100606	1	50
82 x 82 x 82	Grit 80	AAS872100806	1	50
82 x 82 x 82	Grit 100	AAS872101006	1	50



SANDING | ABRASIVES

Nets	Dimension	Grit	Article Number	Packaging	Pcs/transport package
------	-----------	------	----------------	-----------	-----------------------

Bona Net Ceramic



Sanding net with ceramic grains for high sharpness and durability. Gives a medium-fine sanding and is particularly suitable for sanding raw wood and for removing filler residues. Functional both on handheld devices as well as Bona Power Drive and Bona Quattro Disc.

Key Benefits:

- Minimal clogging
- Good dust extraction
- Very high removal rate
- Independent of machine hole system

Technical Data:

Grit type: Ceramic Aluminium oxide
Grit range: 80-120
Size: 150 mm
Backing: Knitted fabric
Coating: Electrostatic
Bonding: Resin over resin

Ø 150 mm	Grit 80	AAS473200806	1	50
Ø 150 mm	Grit 100	AAS473201006	1	50
Ø 150 mm	Grit 120	AAS473201206	1	50
Ø 178 mm	Grit 80	AAS473400806	1	50
Ø 178 mm	Grit 100	AAS473401006	1	50
Ø 178 mm	Grit 120	AAS473401206	1	50

Bona Net Alox



Sanding net with white aluminium oxide for exceptional sanding results and high durability. Gives a fine to medium-fine sanding and is particularly suitable for the final steps in the sanding process. Functional both on handheld devices as well as Bona Power Drive and Bona Quattro Disc.

Key Benefits:

- Minimal clogging
- Good dust extraction
- Very high removal rate
- Independent of machine hole system

Technical Data:

Grit type: White Aluminium oxide
Grit range: 80, 100 and 120
Size: 150 mm
Backing: Knitted fabric
Coating: Electrostatic
Bonding: Resin over resin

Ø 150 mm	Grit 80	AAS473300806	1	50
Ø 150 mm	Grit 100	AAS473301006	1	50
Ø 150 mm	Grit 120	AAS473301206	1	50
Ø 178 mm	Grit 80	AAS473500806	1	50
Ø 178 mm	Grit 100	AAS473501006	1	50
Ø 178 mm	Grit 120	AAS473501206	1	50



SANDING | ABRASIVES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Other Abrasives

Dimension

Grit

Article Number

Packaging

Pcs/transport package

Diamond Sanding Plate



Use Bona Box L for storage and transportation

The Diamond Sanding Plate offers efficient removal of hard lacquers and adhesive residues and can also be used for flattening uneven hardwood floors. Use as a first step prior to the standard sanding sequence when coarse sanding is needed. The design of the diamond segments counteracts clogging and ensures a sustained high removal rate.

Key Benefits:

- Minimal clogging
- Removal of hard lacquer
- Removal of tough materials on wood such as adhesive residues or old foam backing from carpets

Technical Data:

Type: Metal disc

Grit range: 30 and 70

Dimension: Ø 150 mm

Backing: Velcro Backing

Ø 150 mm	Grit 30	AS16001030	1	1
Ø 150 mm	Grit 50	AS16001050	1	1
Ø 150 mm	Grit 70	AS16001070	1	1

Bona around the world

MODERN HOME, WOONHUIS, NETHERLANDS



STYLISH FLOOR RENOVATION IN MODERN HOME

In a modern home in Woonhuis, Netherlands a 200 m² wood floor was renovated. To bring out the unique characteristics of the floor it was first treated with Bona Craft Oil 2K. The floor was then treated with Bona Traffic HD Raw to give it a high level of protection while maintaining the look and feel of untreated wood.



COATINGS



Whether you're aiming for high shine, rich colour, slip resistance or durability, Bona has the ideal surface treatment for all types of floors. Since the 1970s, we have been the world's pioneer in waterborne finishes, providing low VOC solutions for every wood flooring need. Bona continues to drive the development of waterborne lacquers with our latest addition, Bona Mega EVO, the next generation lacquer with a new state-of-the-art crosslinking technology that activates when applied. The unique formula delivers faster curing with excellent resistance to scratches, wear, and chemicals. On the following pages, you will discover all the surface treatments you need to create beautiful, durable and easy-to-manage floors.



1. Primers
2. Lacquers
3. SuperSport System
4. Oils - Wear Treatment
5. Oils - Outdoor
6. Oils - Effect Treatment
7. Fillers & Repair
8. Resilient System
9. Resilient ESD System
10. Resilient Maintenance





COATINGS | WOOD

Primers

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona White



New improved formula for easier application

Pigmented waterborne primer for untreated wood floors designed to give a whitewashed appearance on light wood species. The intensity and depth of colour can be controlled by the number of applications.

Key Benefits:

- White tint look
- Impedes wood yellowing
- Easy roller application

Technical Data:

Base: Acrylate/polyurethane
Category: Waterborne 1-comp
Drying time: 2–3 h between coats
Applications: 2–3
Application tools: Bona Roller
Coverage: 10–12 m²/lit (per coat)

WB250620001	5 L	3	44
-------------	-----	---	----

Bona Natural



New improved formula for easier application

Bona Natural Primer is a pigmented waterborne primer for untreated wood floors designed to give an untreated, raw wood look. It can be applied in one or two coats to achieve the desired appearance.

Key Benefits:

- Retains the look of pure wood
- Easy roller application
- Good abrasion qualities

Technical Data:

Base: Acrylate/polyurethane
Category: Waterborne 1-comp
Drying time: 1–2 h between coats
Application: 1-2
Tools: Bona Roller
Coverage: 10-12 m²/lit (per coat)

WB251620001	5 L	3	44
-------------	-----	---	----

Bona Classic UX



Characterised by simplicity in application and use being quick to dry and easy to abrade with conventional abrasives. A strong foundation for any Bona topcoat. EC1^{PLUS} classified for very low indoor air emissions. Can be used in combination with underfloor heating.

Key Benefits:

- Medium light wood colouration
- All types of wood
- Reduces side-bonding effects
- Easy roller application

Technical Data:

Base: Acrylate/polyurethane
Category: Waterborne 1-comp
Drying time: 1–2 h between coats
Application tools: Bona Roller
Coverage: 8–10 m²/lit (per coat)

WB100613001	1 L	6	50
WB100620001	5 L	3	44



Primers

Article Number

Packaging

Pcs/transport package

Package/pallet

Bona Classic



Provides a well-bodied surface. It creates a soft, flexible film that reduces the potential effects of side bonding and its forgiving application properties make it suitable for practically all types of wood.

Key Benefits:

- Light colouration
- All types of wood
- Reduces side-bonding effects
- Easy roller application

Technical Data:

Base: Acrylate
Category: Waterborne 1-comp
Drying time: 1–2 h between coats
Application tools: Bona Roller
Coverage: 8–10 m²/lit (per coat)

WB200013012	1 L	12	40
WB200020012	5 L	3	44

Bona Intense



Excellent abrasion properties. Highly suitable for floors with underfloor heating and/or floors prone to moving such as end grain or plank floors. Suitable on practically all types of wood and especially on tropical wood.

Key Benefits:

- Medium colouration
- All wood, tropical wood
- First choice for underfloor heating
- Easy roller application

Technical Data:

Base: Polyurethane
Category: Waterborne 1-comp
Drying time: 1–2 h between coats
Applications: 1
Application tools: Bona Roller
Coverage: 8–10 m²/lit (per coat)

WB250020001	5 L	3	44
-------------	-----	---	----

Bona Amber



Excellent abrasion properties. Highly suitable for floors with underfloor heating and/or floors prone to moving such as end grain or plank floors. Suitable for oak and darker types of wood including tropical species.

Key Benefits:

- Rich colouration
- Oak, dark, tropical wood
- Good for underfloor heating
- Easy roller application

Technical Data:

Base: Polyurethane
Category: Waterborne 1-comp
Drying time: 1–2 h between coats
Application tools: Bona Roller
Coverage: 8–10 m²/lit (per coat)

WB255020001	5 L	3	44
-------------	-----	---	----

Bona Quick



A high viscous primer with a gel-like consistency. Use as a first layer on untreated wood, without following abrasion. Use between coats of finish, to reduce abrasion scratches and fill small irregularities for a flawless end-finish.

Key Benefits:

- Very light colouration
- Quick drying gel
- Reduces scratches
- First layer and/or in-between
- Easy trowel application

Technical Data:

Base: Acrylate/polyurethane
Category: Waterborne 1-comp
Drying time: 20–30 min between coats
Applications: 1–3
Application tools: Stainless steel trowel
Coverage: 25–35 m²/lit (per coat)

WB074002002	5 L	1	
-------------	-----	---	--



COATINGS | WOOD

Lacquers

Bona Traffic HD



The world's toughest and fastest drying waterborne finish for wood floors exposed to extreme wear. Extra fast, allows full traffic after just 12 hours. Used in hotels, restaurants and airports worldwide, where short downtime is essential. Waterborne, very low VOC and low odour.

Key Benefits:

- The ultimate choice
- Superior protection for commercial and public areas
- Extra fast, allows full traffic after just 12 hours
- Very low VOC and odour

Technical Data:

Base: Polyurethane
Category: Waterborne 2-comp
Drying time: 2–3 h between coats
Application tools: Bona Roller
Coverage: 8–10 m²/lit (per coat)
 • Complies to EN14904:2006 and DIN 18032:2 (suitable friction for sports floors)
 • EN 71:3 compliant

Silk Matt	WT155346001	4.95 L	3	36
Matt	WT155646001	4.95 L	3	36
Extra Matt	WT155946001	4.95 L	3	36
Hardener	WH330045001	0.41 L	3	

Bona Traffic HD Raw



Its unique surface structure creates a soft, haptic feeling which is not only a pleasure to walk on but has a high slip safety making it great for homes with children and pets. Safe in both application and in use as shown in EC1 classification for very low impact on the indoor air environment.

Key Benefits:

- Keeps the look and feel of raw wood
- Lacquered protection with natural impression
- Easy to apply
- High slip resistance

Technical Data:

Base: Polyurethane
Category: Waterborne 2-comp
Drying time: 2–3 h between coats
Application tools: Bona Roller (AT31001000)
Coverage: 8–10 m²/lit (per coat)

WT194846001	4.95 L	3	36
-------------	--------	---	----

Bona Traffic HD Anti Slip



Adds a higher standard of slip resistance in areas where it is needed most – like stairs, nurseries and kitchens. Superb performance against wet spills.

Key Benefits:

- Increases protection from accidental slips (R10)
- Unmatched durability
- Allows full traffic after 12 hours
- Very low VOC

Technical Data:

Base: Polyurethane
Category: Waterborne 2-comp
Drying time: 2–3 h between coats
Application tools: Bona Roller (AT31001000)
Coverage: 8–10 m²/lit (per coat)

WT153946001	4.95 L	3	36
-------------	--------	---	----



Lacquers

Type

Article Number

Packaging

Pcs/transport package

Package/pallet

Bona Traffic GO



Bona Traffic GO is a top-performing 2K waterborne lacquer with a built-in hardener. With a new generation of 2K hardening technology, Bona Traffic GO combines the simplicity and efficiency of a 1K lacquer with the durability and performance of a true 2K product.

Key Benefits:

- Shake & Go – No mixing – No waste
- Heavy wear durability
- Built-in hardener – activated when applied

Technical Data:

Base: Polyurethane
Category: Waterborne 2-comp
Drying time: 2-3 h between coats
Application tools: Bona Roller (AT31001000)
Coverage: 8-10 m²/lit (per coat)

Silk Matt	WT400320001	5 L	3	36
Matt	WT400620001	5 L	3	36
Extra Matt	WT400920001	5 L	3	36
Ultra Matt	WT400820001	5 L	3	36
Matt	WT400613012	1 L	6	90
Ultra Matt	WT400813012	1 L	6	90

Bona Mega EVO



Bona Mega EVO is the next generation lacquer with a new state-of-the-art crosslinking technology that activates when applied. The unique formula delivers faster curing with excellent resistance to scratches, wear, and chemicals. With VOC levels below 3%, the lacquer has a lower impact on indoor air quality.

Key Benefits:

- Rapid development of performance
- Forgiving application
- Great filling power

Technical Data:

Base: Acrylate/polyurethane
Category: Waterborne 1-comp
Drying time: 1-2 h between coats
Application tools: Bona Roller (11 mm)
Coverage: 8-10 m²/lit (per coat)

Silk Matt	WT500320001	5 L	3	44
Matt	WT500620001	5 L	3	44
Extra Matt	WT500920001	5 L	3	44
Ultra Matt	WT500820001	5 L	3	44
Silk Matt	WT500313001	1 L	6	90
Matt	WT500613001	1 L	6	90
Extra Matt	WT500913001	1 L	6	90
Ultra Matt	WT500813001	1 L	6	90



COATINGS | WOOD

Lacquers

Bona Mega



For offices, small shops, hotel rooms and homes. Waterborne, one-component formula, that reacts with oxygen and performs like a two-component. No mixing required, use straight from the bottle. Also very good for wide plank floors and for floors with underfloor heating.

Key Benefits:

- Superior protection for commercial areas
- 1-component with 2-component performance
- Very good for underfloor heating

Technical Data:

Base: Polyurethane

Category: Waterborne 1-comp

Drying time: 2–3 h between coats

Application tools: Bona Roller

Coverage: 8–10 m²/lit (per coat)

- Meets DIN 18032:2 for slip resistance gloss, silk matt & matt)
- EN 71:3 Compliant

Gloss	WT133013012	1 L	12	40
Gloss	WT133020002	5 L	3	44
Silk Matt	WT133313012	1 L	12	40
Silk Matt	WT133320002	5 L	3	44
Matt	WT133613012	1 L	12	40
Matt	WT133620001	5 L	3	44
Extra Matt	WT133920001	5 L	3	44

Bona Domo



Bona Domo is a member of the Bona family of premium finishes. With good build and a quick drying formula, it protects the wood floor in no time. Bona Domo can be used from start to finish, both as a basecoat and as a topcoat. Bona Domo is easy to abrade.

Key Benefits:

- Good build
- Forgiving/easy application
- Easy to abrade
- Primer and topcoat in one

Technical Data:

Base: Polyurethane

Category: Waterborne 1-comp

Drying time: 1-2 h between coats

Application tools: Bona Roller

Silk Matt	WT220320001	5 L	3	44
Matt	WT220620001	5 L	3	44



Lacquers

Type

Article Number

Packaging

Pcs/transport package

Package/pallet

Bona Retarder



Bona Retarder is an additive that improves the levelling and prolongs the open time of Bona waterborne finishes, both primers and topcoats. It is designed to be used when the indoor humidity is low and/or the temperature of the room is higher than normal. Using Bona Retarder will reduce the risk of the finish drying too quickly and leaving roller marks in the dried coat.

Key Benefits:

- Extends open time
- Facilitates application in dry and/or warm climate conditions
- Reduces risk of lap marks

WX100006001

0.2 L

12

120

Bona Blocker



Additive for reducing bleeding from wood extracts and particularly extracts from knots as well as tannin bleed on white oak. Reduces the risk of stains developing on top of the knots and tannin bleed on white oak. One bottle is sufficient for two 5L cans of Bona White or Bona Natural Primer.

Key Benefits:

- Reduces yellowing from wood knots

Technical Data:

Mixing Ratio: 20:1 (4,8%)**Volume:** 0,5L, enough for 2x5 L of paint

WH341009001

0.5 L

15

Filter Bag



Extra fine filter for 5 litre cans. Helps avoid dried particles from ending up on the floor, particularly if the can has been opened previously.

AT31465120

100

1000



COATINGS | SPORT

SuperSport System

Bona SuperSport Primer



Primer made especially for handling the flexing and movement of wood sports floors. Provides excellent adhesion to wood and is easy to apply on large surfaces thanks to excellent levelling properties and long open time. Suitable on practically all types of wood.

Key Benefits:

- No stretched finish or "white lines"
- Excellent abrasion properties
- Extended open time

Technical Data:

Base: Polyurethane
Category: Waterborne 1-comp
Drying time: 2–3 h between coats
Application: Bona Roller
Coverage: 8–10 m²/lit (per coat)

	WB251020001	5 L	3	44
--	-------------	-----	---	----

Bona SuperSport HD



Finish made especially for handling the flexing and movement of wood sports floors. Excellent levelling properties and long open time make it easy to apply on large surfaces. Approved to both of the leading standards for indoor sports floors (EN 14904:2006 & DIN 18032:2).

Key Benefits:

- High resistance to wear and scuffing
- Perfectly balanced friction
- Easy to maintain
- Recommended by FIBA for the highest level of competition.

Technical Data:

Base: Polyurethane
Category: Waterborne 2-comp
Drying time: 2–3 h between coats
Application: Bona Roller
Coverage: 8–10 m²/lit (per coat)
 • Complies to EN14904:2006 and DIN 18032:2 (suitable friction for sports floors)

Gloss	WT137020001	5 L	3	36
Matt	WT137620001	5 L	3	36
Hardener	WH370045001	400 ml	1	

Bona SuperSport ONE



One-component sport lacquer with oxygen crosslinking technology for durability and appearance. Premium, waterborne wood floor finish specifically formulated for professional use on wood sport floors. Provides a tough, polyurethane finish with good build. Compliant with the European standard for indoor sports surfaces for safe play.

Key Benefits:

- High resistance to wear and scuff marks
- Recommended by FIBA for highest level of competition

Technical Data:

Base: Oil-modified polyurethane
Category: Waterborne 1-comp
Drying time: Full hardness after 5 days
Application: Bona Roller (11 mm)
Application rate: 8–10 m²/lit (per coat)

Gloss	WT138020001	5 L	3	44
Matt	WT138620001	5 L	3	44



COATINGS | SPORT

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

SuperSport System

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona SuperSport Line Paint



Specialist paint for line-marking indoor sports surfaces with. Waterborne and conveniently ready for use, straight from the can. If required, such as when painting on pre-finished surfaces or if the line-markings will be exposed to direct wear, Bona SuperSport HD Hardener (sold separately) can be added to give increased wear and chemical resistance as well as even greater adhesion.

Key Benefits:

- Excellent adhesion
- Quick drying
- Excellent hiding
- For wood and resilient floors

Technical Data:

Base: Polyurethane

Category: Waterborne 1-comp

Drying time: 1–2 hours between coats

Application: Fine brush or short-haired roller

Coverage: 6–10 m²/lit (per coat) or 120–200 m of line-marking

Yellow	EC801113101	1 L	1	
Red	EC801413101	1 L	1	
Orange	EC801213101	1 L	1	
Light Blue	EC801813101	1 L	1	
Dark Blue	EC801713101	1 L	1	
Violet	EC801313101	1 L	1	
Light Green	EC801613101	1 L	1	
Dark Green	EC801513101	1 L	1	
Black	EC801913101	1 L	1	
White	EC802013101	1 L	1	

Bona SuperSport Cleaner



Concentrated slightly alkaline detergent specifically designed for frequent cleaning of indoor sports surfaces. Bona SuperSport Cleaner is gentle on the surface yet will effectively remove grease and grime, leaving no slippery or greasy film. Low foaming formula, suitable for auto scrubber as well as manual application.

Key Benefits:

- Safe on wood
- Low foaming
- Leaves no slippery residue

Technical Data:

Dilution: 1:100 for general use

WM763020001	5 L	3	44
-------------	-----	---	----

Bona SuperSport Deep Clean



Designed for occasional cleaning of indoor sports floors to remove black heel marks, handball glue as well as build-up of body fats and other contaminants that may make the surface slippery.

Key Benefits:

- Degreases floor and restores friction
- Removes scuff marks
- Removes certain types of handball glue

Technical Data:

Dilution: 1:5

ML1	WM636020001	5 L	3	44
ML2	WM636020002	5 L	3	44



COATINGS | WOOD

Oils – Wear Treatment

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Craft Oil 2K



Performance, versatility and design – get the charming look and feel of an oiled floor, plus the protection of a finish. Bona Craft Oil 2K has a unique formula, made from modified plant based oil, exhibits accelerated drying time and strengthened wear resistance. Works perfectly with a wide variety of wood species including otherwise problematic ones such as jatoba, cherry, walnut and more. It delivers a beautiful and strong water- and stain-resistant surface and is ready for light use in just 12 hours.

Key Benefits:

- High performance plant-based oil
- Protects in 1 coat
- Long open-time, quick cure
- Overcoatable with Bona Traffic HD, Bona Traffic HD Raw & Bona Traffic HD Anti-slip.

Technical Data:

Base: Modified vegetable oils incl. isocyanate hardener

Category: Hardening oil, 2-comp

Solids content: 96-98%

Drying time (until use): 12 h

Application tools: Rubber applicator, short-haired roller or stainless steel trowel

Coverage: 20 m²/lit (per coat)

Neutral	GT570014001	1.25 L	6	
Neutral	GT570008001	400 ml	6	
Frost	GT571114001	1.25 L	6	
Frost	GT571108001	400 ml	6	
Clay	GT572114001	1.25 L	6	
Clay	GT572108002	400 ml	6	
Graphite	GT573114001	1.25 L	6	
Graphite	GT573108002	400 ml	6	
Ash	GT574114001	1.25 L	6	
Ash	GT574108002	400 ml	6	
Umbra	GT575114001	1.25 L	6	
Umbra	GT575108001	400 ml	6	
Light Grey	GT576114011	1.25 L	6	
Light Grey	GT576108001	400 ml	6	
Invisible	GT580014011	1.25 L	6	
Invisible	GT580008001	400 ml	6	
Sand	GT579114011	1.25 L	6	
Sand	GT579108001	400 ml	6	
Misty	GT581014011	1.25 L	6	
Misty	GT590608007	400 ml	6	
Driftwood	GT582014011	1.25 L	6	
Driftwood	GT582008001	400 ml	6	
Provincial	GT583014011	1.25 L	6	
Provincial	GT583008001	400 ml	6	



Oils – Wear Treatment

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Craft Oil



Professional wood oil with excellent saturation properties offering deep protection against wear, chemicals and moisture. Due to its high oil content and outstanding penetration properties only a single application is typically required, making surface treatment a simple and fast job. Equally suitable in homes and public environments. Safe for application on children's toys (EN 71-3). Available in both neutral and white versions.

Key Benefits:

- Extremely high degree of saturation for fast surface treatment
- Enhances the grain and colour of the wood
- Low in odour and in solvents (<4%)
- Open, breathing surface

Technical Data:

Base: Modified vegetable oils

Category: Hardening oil, 1-comp

Solids content: 96–98%

Drying time (until use): 24 h

Application: Rubber applicator, Bona Wool pad or stainless steel trowel

Coverage: 20 m²/lit (per coat)

Neutral	GT560115001	2.5 L	4	
Neutral	GT560120001	5 L	2	
Neutral	GT560113001	1 L	6	
Frost	GT561115001	2.5 L	4	
Frost	GT561113001	1 L	6	

Bona Hard Wax Oil



Natural oil, modified for superior protection of wood floors. Produces the warm look of an oiled floor while establishing a hardwearing and stain resistant surface that is spot-repairable and easy to maintain. Unique composition formulated without questionable substances such as cobalt and ketoximes. Low in application odour for its type and easy to handle, being applicable with roller, brush and trowel. Leaves an open, breathing surface that reduces the risk of side-bonding. Highly suitable for floors with underfloor heating. Combines perfectly with Bona Craft Oil for colouring and changing the design of wood floors.

Key Benefits:

- Tough and dirt repellent
- Excellent water resistance
- Warm colour and natural look
- Free from cobalt and ketoximes (2-butoxime, butoxime, MEKO)

Technical Data:

Base: Modified vegetable oils

Category: Hardening oil, 1-comp

Solids content: 96–98%

Drying time (until use): 24 h

Application: Roller, brush or stainless steel trowel

Coverage: 20 m²/lit (per coat)

Silk Matt	AF3100013	1 L	6	
Silk Matt	AF3100025	2,5 L	2	
Silk Matt	AF3102010	10 L	1	
Matt	AF3600013	1 L	6	
Matt	AF3600025	2,5 L	2	
Matt	AF3602010	10 L	1	
Extra Matt	AF390013001	1 L	6	
Extra Matt	AF390015001	2,5 L	2	
Extra Matt	AF390024001	10 L	1	



COATINGS | WOOD

Oils – Outdoor

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Decking Oil



Bona Decking Oil is a concentrated blend of vegetable oils, modified for superior impregnation and the long-lasting protection of decking and other exterior woodwork. It enhances the natural wood grain while protecting against moisture ingress, thus reducing the potential of wood cracking and warping.

Key Benefits:

- Long-lasting protection
- Contains UV protection
- Excellent water repellence

Technical Data:

Base: Modified vegetable oils

Category: Hardening oil, 1-comp

Drying time (until use): 24 h


Application: Wide brush or mohair roller

Coverage: Approx. 20 m²/lit (per coat)

Neutral	GT551115001	2.5 L	4	
Neutral	GT551124001	10 L	2	
Mahogany	GT551215001	2.5 L	4	
Teak	GT551315001	2.5 L	4	
Grey	GT551515001	2.5 L	4	

Bona around the world

THE NOMAD HOTEL, LONDON, GREAT BRITAIN

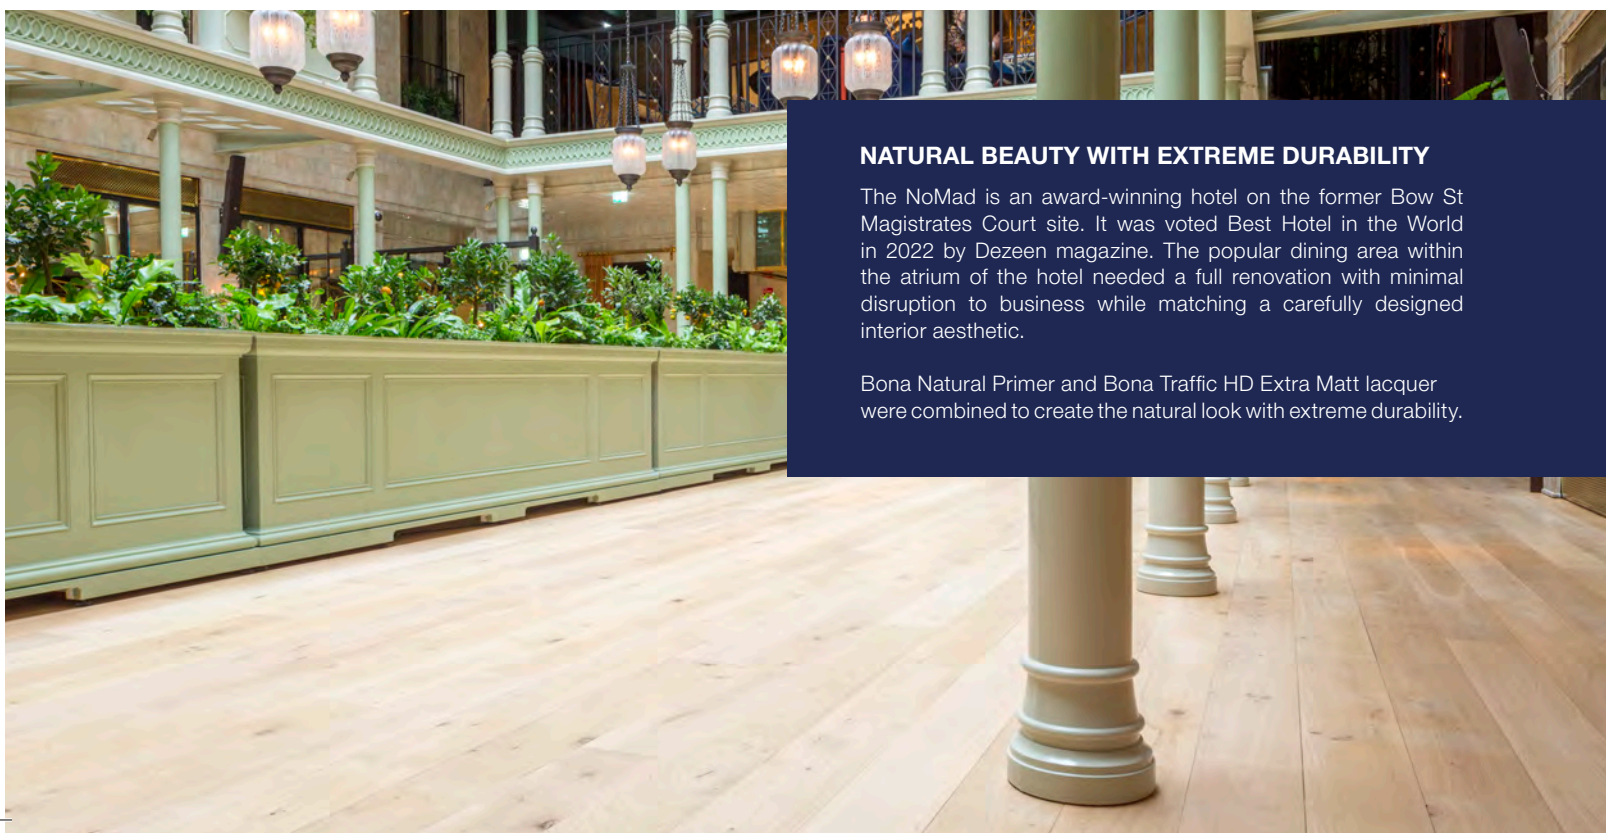

NATURAL BEAUTY WITH EXTREME DURABILITY

The NoMad is an award-winning hotel on the former Bow St Magistrates Court site. It was voted Best Hotel in the World in 2022 by Dezeen magazine. The popular dining area within the atrium of the hotel needed a full renovation with minimal disruption to business while matching a carefully designed interior aesthetic.

Bona Natural Primer and Bona Traffic HD Extra Matt lacquer were combined to create the natural look with extreme durability.



Oils - Effect Treatment

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Mix Colour



Concentrated pigment paste for water soluble coatings. Specially suitable for tweaking the colour of Bona Nordic Tone and Bona Rich Tone but can also be added in small amounts to all Bona waterborne lacquers to give the floor a light tint. May also be added to Mix&Fill Plus to optimise the joint colour when joint filling.

Technical Data:

Content: Concentrated pigment paste

Consumption: 250 ml for one 5 litre bottle (5%) of Bona Nordic Tone or Bona Rich Tone.

Mahogany	GX504007	0.25 L	12	
Walnut	GX504107	0.25 L	12	
White	GX504207	0.25 L	12	
Grey	GX504307	0.25 L	12	
Black	GX504407	0.25 L	12	

Bona Nordic Tone



Bona Nordic Tone is a pre-treatment to Bona Craft Oil or Bona Craft Oil 2K for creating the unique character of a Scandinavian white washed floor. Combine with Bona Craft Oil or Bona Craft Oil 2K Frost or choose a contrasting colour for an exciting 2-dimensional effect. The colour can be changed or further intensified by adding 5% of Bona Mix Colour to the Tone.

Key Benefits:

- Light, white washed effect
- Inhibits wood yellowing
- Whiteness can be controlled by number of applications (normally only one application is necessary)

Technical Data:

Base: Emulsified oils and waxes, pigmentation

Category: Pre-treatment, 1-comp

Drying time: 1–2 h (between applications)

Application: Oil application sleeve or wide floor brush

Coverage: 8–10 m²/lit (per coat)

	WX700020001	5 L	3	44
--	-------------	-----	---	----

Bona Rich Tone



Bona Rich Tone is a pre-treatment for hardwoods, bringing out a dark, smoky wood colour*, and giving the floor a touch of sophistication. Continue with a layer of Bona Craft Oil or Bona Craft Oil 2K in any colour, for an exciting 2-dimensional effect or apply Bona Hard Wax Oil directly for an elegant finish. The colour can be changed or further intensified by adding 5% of Bona Mix Colour.

*the colour is achieved by a chemical reaction to wood and results may vary between wood species. Oak in particular reveals a deep, dark colouration after treatment.

Key Benefits:

- Dark, smoky effect
- Quick drying
- Odourless

Technical Data:

Base: Alkaline solution

Category: Pre-treatment, 1-comp

Drying time: 1–2 h (between applications)

Application: Oil application sleeve

Coverage: 8–10 m²/lit (per coat)

	WX900020001	5 L	3	44
--	-------------	-----	---	----



COATINGS | WOOD & RESILIENT

Fillers & Repair

Article Number

Packaging

Pcs/transport package

Package/pallet

Bona Mix&Fill Plus



Time-saving gap filler with exceptional filling ability (up to 3 mm) often only requiring a single application to achieve a smooth surface. The filler is mixed with wood dust from the actual floor to be treated, producing a natural colouration that blends in with the rest of the floor. Suitable for light to medium coloured wood species.

Key Benefits:

- Exceptional filling ability
- Quick drying
- Anti-corrosive

Technical Data:

Base: Acrylate

Category: Waterborne 1-comp

Drying time (until sanding): 30–60 min

Application: Stainless steel trowel

Coverage: 8–12 m²/lit (per coat)

WF220020001

5 L

3

44

Bona Mix&Fill



Gap filler for gaps up to 2 mm wide, suitable for practically all types of wood. The filler is mixed with wood dust from the actual floor to be treated producing a natural colouration that blends in with the rest of the floor.

WF21001302

1 L

10

WF21002002

5 L

3

44



Bona PU Filler



2-part polyurethane filler and adhesive. Developed for quick and durable repair of resilient floorings such as PVC/LVT, Rubber and Linoleum, with great adhesion to many materials.

Key Benefits:

- Super quick hardening
- Excellent adhesion properties
- High durability

Technical Data:

Colour: Light Grey

Open Time: 3,5 min

Drying time: 30 min

ES600003250

250 ml

12

Green Mixer
Tips

ES500000110

10

10



Resilient System

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona LinoPrime



Quick drying PUR-based primer for pore filling of deep cleaned and sanded linoleum floors. Improves levelling and smoothness of the following coat, which typically can be applied already after 1 hour.

Key Benefits:

- Fills pores and reduces absorbency
- Ultra-quick drying
- Essential for linoleum

Technical Data:

Category: Waterborne 2-comp

Drying time: 1-2 h between coats

Application tools: Bona Roller (5 or 11 mm)

Coverage: 20–25 m²/lit (per coat)

	EB400620001	5 L	3	36
Hardener	EH390002001	0.2 L	3	

Bona Pure HD



Particularly suitable for thin, hard-elastic flooring in locations exposed to high wear with excellent resistance to scratches and scuffs. Reduces porosity thus helping to simplify routine maintenance and keeping good floor hygiene. Waterborne, clear, non- yellowing formula.

Key Benefits:

- Extreme wear resistance
- Allows full traffic after 12h
- Clear, non-yellowing formula
- Long-lasting protection

Technical Data:

Category: Waterborne 2-comp

Drying time: 2-3 h between coats

Application tools: Bona Roller (11 mm)

Coverage: 8–10 m²/lit (per coat)

Matt	ES207920001	5 L	3	36
Silk Matt	ES207320001	5 L	3	36
Extra Matt	ES207920003	5 L	3	36
Hardener	ES205045011	0,45 L	3	

Bona SuperSport Pure HD



Bona SuperSport Pure HD is a hard-elastic and hardwearing PUR coating for the treatment of resilient floor coverings in sport halls.

Key Benefits:

- Tough PUR protection for resilient sport floors
- Rapid drying for minimal downtime. Back on the floor in 12 hours
- Optimal application and levelling properties
- Compliant to EN 14904:2006 (Indoor Sport Surfaces)

Technical Data:

Category: Waterborne 2-comp

Drying time: 2-4 h between coats

Application tools: Bona Roller

Coverage: 8–10 m²/lit (per coat)

Matt	ES201620005	5 L	3	36
Hardener	ES205045005	0,45 L	3	



COATINGS | RESILIENT

Resilient System

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Pure Colour



Bona Pure Colour ensures a quick application process with accelerated drying properties and being heavily pigmented for coverage in a single coat. The Bona Pure Colour collection has been expertly developed through modern evidence-based colour psychology. By incorporating natural elements colour can profoundly enhance well-being and improve physical health. Must be overcoated by Bona Pure HD.

Key Benefits:

- Heavily pigmented for excellent hide
- Ultra-quick drying for minimal downtime
- Expertly developed through evidence-based colour psychology

Technical Data:

Category: Waterborne 2-comp

Drying time: 2-4 h between coats

Application tools: Bona Roller (11 mm)

Coverage: 8-12 m²/lit (per coat)



Natural Collection

	Earthy Charme	ES820120001	5 L	1	
	Terra Rouge	ES820220001	5 L	1	
	Raw Umber	ES820320001	5 L	1	
	Alabaster Beige	ES820420001	5 L	1	
	Mocha Clay	ES820520001	5 L	1	
	Limestone Whisper	ES820620001	5 L	1	
	Desert Greige	ES820720001	5 L	1	
	Golden Dune	ES820820001	5 L	1	
	Sandy Shore	ES820920001	5 L	1	
	Chalky Taupe	ES821020001	5 L	1	
	Sage Terrain	ES821120001	5 L	1	
	Earthy Olive	ES821220001	5 L	1	
	Granite Grey	ES821320001	5 L	1	
	Slate Stone	ES821420001	5 L	1	
	Dusk Rock	ES821520001	5 L	1	



COATINGS | RESILIENT

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Resilient System

Type

Article Number

Packaging

Pcs/transport
package

Package/
pallet

Classic Collection

	Custom	EC800020001	5 L	1	
BEIGE	RAL 1001	EC813720001	5 L	1	
LIGHT IVORY	RAL 1015	EC814720001	5 L	1	
BRILLIANT BLUE	RAL 5007	EC803620001	5 L	1	
LIGHT BLUE	RAL 5012	EC805620001	5 L	1	
PIGEON BLUE	RAL 5014	EC801620001	5 L	1	
PASTEL TURQUOISE	RAL 6034	EC804620001	5 L	1	
BASALT GREY	RAL 7012	EC802620001	5 L	1	
AGATE GREY	RAL 7038	EC811720001	5 L	1	
TELEGREY	RAL 7047	EC812720001	5 L	1	
JET BLACK	RAL 9005	EC806620001	5 L	1	

Bona R Creative Chips



Acrylate-based paint chips for a livelier impression. Used in combination with Bona Pure Colour.

	Earthy Charm	ES216013001	1 kg	1	
	Raw Umber	ES216113001	1 kg	1	
	Alabaster Beige	ES216213001	1 kg	1	
	Desert Greige	ES216313001	1 kg	1	
	Chalky Taupe	ES216413001	1 kg	1	
	Salt & Pepper	ES200013501	1 kg	1	
	Black & White	ES200013502	1 kg	1	
	Terra-mix	ES200013503	1 kg	1	



COATINGS | RESILIENT

Resilient ESD System

Bona Pure ESD Clear



Bona Pure ESD Clear is a durable, highly transparent topcoat able to dissipate static electricity and transport it to ground. It is used as a standalone product for renovation of existing conductive floors.

Key Benefits:

- Durable PUR protection for resilient floors
- Fast curing in only 12 hours for minimal downtime.
- Restores the conductivity of ESD floors
- Meets EN 61340-5-1:2001 standard

Technical Data:

Category: Waterborne 2-comp
Drying time: 1-3 h between coats
Application tools: Bona Roller (11 mm)
Coverage: 15-20 m²/lit (per coat)

Matt	ES251620001	5 L	3	36
Hardener	ES205045001	0.45 L	3	

Bona Pure ESD Vibrant



Used in conjunction with Bona Pure Colour ESD base paint, Bona Pure Vibrant is a durable topcoat able to dissipate static electricity and transport it to ground. It has a high resistance to chemicals and common disinfectants.

Key Benefits:

- Durable PUR protection for resilient floors
- Fast curing in only 12 hours for minimal downtime.
- Restores the conductivity of ESD floors
- Meets EN 61340-5-1:2001 standard

Technical Data:

Category: Waterborne 2-comp
Drying time: 1-3 h between coats
Application tools: Bona Roller (11 mm)
Coverage: 15-20 m²/lit (per coat)

Matt	ES250620001	5 L	3	36
Hardener	ES205045011	0.45 L	3	

Bona Pure Colour ESD



Bona Pure Colour ESD is a waterborne base paint available in three versatile colours. It is heavily pigmented for exceptional coverage and is quick drying for minimal downtime. When used for renovating floors it improves the conductive properties and restores a high level of electrostatic safety. Must be overcoated by Bona Pure ESD Vibrant.

Key Benefits:

- Heavily pigmented for exceptional coverage
- Quick-drying for minimal downtime
- Restores the conductivity of ESD floors
- Meets EN 61340-5-1:2001 standard

Technical Data:

Category: Waterborne 2-comp
Drying time: 1-3 h between coats
Application tools: Bona Roller (11 mm)
Coverage: 10-12 m²/lit (per coat)

PIGEON BLUE	RAL 5014	EC811620001	5 L	1	
PASTEL TURQUOISE	RAL 6034	EC814620001	5 L	1	
AGATE GREY	RAL 7038	EC851720001	5 L	1	



COATINGS | RESILIENT

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Resilient – Maintenance

Bona PowerRemove R



Aggressive cleaning agent developed for stripping polish, dirt and old cleaning residue from resilient floor coverings such as PVC, Linoleum, LVT, or Rubber. Quick and efficient.

Key Benefits:

- For quick removal of old maintenance coatings and contaminants
- Very high degree of efficiency
- Reduced pH prevents alkaline staining

Technical Data:

pH-value: approx. 10.5 (conc.)

Dilution: 1:4 - 1:19 or 5-20% added to clean water

EM703020001

5 L

3

44

Bona Clean R50



Bona Clean R50 is particularly suited for the routine cleaning of resilient flooring treated with products from the Bona Resilient System. It may be used for daily cleaning, as well as to remove severe soiling. Bona Clean R50 is also suitable for use in automatic cleaning systems.

Key Benefits:

- Gentle, yet effective, even at low dosage
- Highly concentrated
- Low foaming

Technical Data:

pH-value: approx. 9 (conc.)

Dilution: Normal Cleaning: 50 ml to 10 L water (1:200)

Intensive Cleaning: 250 ml to 10 L water (1:40)

EM701020001

5 L

3

44

Bona Shield R



Bona Shield R is a polyurethane reinforced maintenance coating developed specifically for surfaces treated with a Bona Pure coating. However, it can also be used on other resilient surfaces, such as linoleum and PVC.

Key Benefits:

- High durability
- Quick drying
- Comfortable friction

Technical Data:

Dilution: Do not dilute

Drying time: 1-2 hours at 20°/60% R.H.

Matt

EP501320001

5 L

3

44

Gloss

EP597020001

5 L

3

44

FLOOR CARE



Proper maintenance is vital when it comes to retaining the long-lasting beauty of floors. Bona floor care solutions are specially developed for cleaning and revitalising your floors. Suitable for all wood and resilient surfaces, Bona floor care solutions effectively remove the toughest dirt and grime from floors. Read more about Bona Commercial System and other best-in-class floor care solutions for both professional users and private homeowners on the following pages.



1. Deep Clean System
2. Lacquer – Maintenance
3. Oils – Maintenance





FLOOR CARE

Deep Clean System

Bona PowerScrubber 2.0



The Bona PowerScrubber is a versatile and powerful scrubbing machine for cleaning of most indoor floor surfaces as well as outdoor wood deckings.

Bona PowerScrubber 2.0 enables the most effective deep-down cleaning, combined with unrivalled versatility and ease. Counter-rotating roller brushes provide deep, effective cleaning while the powerful, yet compact design of Bona PowerScrubber 2.0 delivers even more performance than most auto scrubbers, as well as the benefits of ergonomic operation, set-up and transportation. Recommended detergents: Bona Deep Clean Solution

Key Benefits:

- Effective deep clean
- Wide range of surfaces
- Ergonomic design and operation
- Easy to fill, assemble and transport
- Indoor and outdoor use

Technical Data:

Motor rating: Max 2300 W, Avg. 1900 W

Power supply: 230 V / 50 Hz

Machine weight: 34.5 kg

Scrubbing brush: 2 x 400 mm soft white nylon

Solution capacity: 10 L

Recovery tank capacity: 10 L

Dimensions: 520 mm x 470 mm x 300 mm

AM400201100

1

Roller Brush



White – For oiled or lacquered floors.

Orange – For profiled deckings.

Red – For oiled and hard wax oiled floors.

Green – Lightly abrasive roller for aggressive cleaning of oiled floors.

Black – Stone and Tiles.

White

AS3647622500

400 mm

1

Orange

AS3647625250

400 mm

1

Red

AS3647624580

400 mm

1

Green

AS3647622520

400 mm

1

Black

AS3647624810

400 mm

1

Suction bar



Replacement suction bar including springs, for the Bona PowerScrubber. Note: Sold per piece, two are needed for a full replacement.

AS3647770970

400 mm

1

Bona Deep Clean Solution



Bona Deep Clean Solution is a versatile heavy-duty cleaner for both wood and resilient flooring. It is excellent for both periodic deep cleaning and as a degreaser before recoating. Outdoors it is also excellent for annual cleaning of worn wood decking.

Key Benefits:

- Revitalises dull, dirty floors
- Dissolves deeply ingrained dirt and stubborn scuff marks
- Optimised for Bona PowerScrubber

Technical Data:

Dilute with clean water

• Finished surfaces: 1:10

• Oiled surfaces: 1:20

• Outdoor deckings: 1:10

WM650020010

5 L

3

44



FLOOR CARE

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Lacquer — Maintenance

Type

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Polish Matt



Bona Polish Matt is a waterborne maintenance coating that is compatible with a wide range of surfaces including finished parquet, laminate, linoleum and PVC. Reinforced with polyurethane, it leaves an exceptionally durable wear layer, making it suitable for use in both domestic and commercial environments.

Key Benefits:

- Even, matt surface
- Requires no buffing
- High wear resistance

Technical Data:

Base: Acrylate/Polyurethane

Drying time (until use): < 1 h

Application: Bona Polish Applicator

Coverage: 50 m²/L

Matt	WP500313006	1 L	6	50
Matt	WP500320001	5 L	3	44

Bona Polish Gloss



Bona Polish Gloss is a waterborne maintenance coating that is compatible with a wide range of surfaces including finished parquet, laminate, linoleum and PVC. Reinforced with polyurethane, it leaves an exceptionally durable wear layer, making it suitable for use in both domestic and commercial environments. Gives the surface new lustre and continued protection against wear.

Key Benefits:

- Good adhesion to many surfaces
- Requires no buffing
- Scuff resistant
- Slip resistance compliant to EN 14904

Technical Data:

Base: Acrylate/Polyurethane

Drying time (until use): < 1 h

Application: Bona Polish Applicator

Coverage: 50 m²/L

Gloss	WP511013006	1 L	6	50
Gloss	WP511020001	5 L	3	44

Bona Remover



Concentrated polish remover with balanced pH for safe use on wood floors. In addition to removing polish it is also effective for removing scuff marks. Low foaming and low odour. Adapted for wood but possible to use on most types of water-resistant floorings including tiles, vinyl and linoleum floors.

Key Benefits:

- Balanced stripping agent for safe use on wood
- Effective on Bona's Polishes and many other types of polish
- Concentrated

Technical Data:

pH-value: Concentrate approx. 9
Use solution: 8

Dilution: 1 litre to 1-5 litres of water
(17-50% of remover)

	WM702013200	1 L	6	50
--	-------------	-----	---	----



FLOOR CARE

Lacquer — Maintenance

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Freshen Up



Bona Freshen Up is a waterborne maintenance coating for the frequent maintenance of finished wood floors. Based on a pure polyurethane dispersion, it leaves an exceptionally durable wear layer, making it suitable for use in both domestic and commercial environments. Bona Freshen Up is high gloss and gives dull floors new shine and luster. Meets both EN 14904:2006 and DIN 18032:2 on slip resistance.

Key Benefits:

- Wax-free maintainer
- Allows for future overcoating with waterborne finish
- High wear resistance

Technical Data:
Base: Acrylate/Polyurethane

Drying time (until use): < 1 h

Application: Bona Polish Applicator

Coverage: 50 m²/L

WP595013106	1 L	6	50
WP595020002	5 L	3	44

Bona Cleaner



Concentrated detergent for simple and safe cleaning of finished wood and cork floors. Low foaming and equally suitable for machine cleaning and manual cleaning. Leaves no dulling or slippery residue.

Key Benefits:

- Effective yet safe on wood
- Low foaming
- Fresh smell

Dilution:

- Normal use: 1:100
- Heavily soiled floors: 1:50

WM760013006	1 L	6	50
WM760020001	5 L	3	44

Oils — Maintenance

Article Number

Packaging

Pcs/transport
packagePackage/
pallet

Bona Oiled Wood Floor Refresher



Bona Oiled Wood Floor Refresher makes the maintenance of oiled wood floors easy. Simply pour onto surface, distribute, and let dry. The product requires no machine buffing and the floor is ready for light foot traffic in as little as 1-2 hours after application.

Key Benefits:

- Restores dry, oiled wood floors
- Contains linseed oil
- Improves resistance to water and spills

Technical Data:
Application tools: Bona Cleaning Pad

Coverage: Approx. 40-60 m²/litre

WP605013001	1 L	6	
-------------	-----	---	--



FLOOR CARE

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Oils — Maintenance

Article Number

Packaging

Pcs/transport
package

Package/
pallet

Bona Oil Care



Rapid drying maintenance oil for protecting and reviving oiled wooden floors. Consists of a low-viscous blend of different vegetable oils with excellent penetration ability. Replenishes the wood pores for sustained protection.

Key Benefits:

- Restores and protects
- Great coverage rate
- Quick drying
- Low viscosity, easy to spread

Technical Data:

Base: Modified vegetable oils
Category: Hardening oil, 1-comp
Drying time (until use): 12 h
Application: Bona Wool pad or cotton cloth
Coverage: 50–100 m²/L

Pure	GT525113100	1 L	12	60
Pure	GT525120100	5 L	2	50

Bona Wax Oil



Durable wax oil for periodic maintenance of oiled and hardwax oiled surfaces. Restores dry oiled floors and adds a protective layer of wax for increased resistance to water and spills.

Key Benefits:

- Quick drying
- Low in solvents and odour
- Highly water repellent

Technical Data:

Base: Modified vegetable oils and waxes
Category: Hardening oil, 1-comp
Drying time (until use): 12 h
Application: Bona Woolpad or stainless steel trowel
Coverage: 50–80 m²/L

WP615013100	1 L	12	60
-------------	-----	----	----

Bona Oil Soap



Detergent based on vegetable oil for frequent cleaning and maintenance of oiled wood floors. Bona Oil soap nourishes the surface and leaves a thin film that can be buffed for increased shine.

Key Benefits:

- Gentle on oiled surfaces
- Cleans and conditions
- Long lasting concentrate

Technical Data:

pH-value: Approx. 9
Dilution: 1:50

WM704013100	1 L	6	45
WM704020100	5 L	3	44

TOOLS & ACCESSORIES



Perfect floors can only be achieved with the right tools. Through decades of working closely with craftsmen, Bona knows exactly what is required when it comes to working with floors. That's why our tools and accessories are expertly developed for seamless compatibility with all our flooring products. From rollers and gun applicators to dust bags and floor care tools, you will find all the equipment you need for every floor task in this section.



- 1. Coatings
- 2. Fastening
- 4. Measurement
- 5. Occupational Safety
- 6. Floor Care





TOOLS & ACCESSORIES

Coatings

Bona Microfleece Roller 11 mm



Roller with dense microfleece pile for a perfectly smooth application of waterborne finishes. Includes side-guards which help maintain a consistent application rate. 11 mm pile.

25 cm

AT31001000

1

10

Bona Microfibre Roller 11 mm



Microfibre roller for an even application of lacquer producing a low degree of foam. 11 mm pile.

25 cm

AT31002200

1

10

Bona Microfibre Roller 11 mm



Microfibre roller for an even application of lacquer producing a low degree of foam. 11 mm pile.

41,5 cm

AT31002600

1

5

Bona Microfibre Roller 5 mm



Short pile microfibre roller especially suitable for hardwax oil and waterborne paint. 5 mm pile.

25 cm

AT31120897

1

10

Bona SuperCoat Roller



Quality roller with a polyester pile for correct application rate of lacquer. 11 mm pile.

10 cm

AT31002310

1

10

25 cm

AT31002325

1

1

38 cm

AT31002338

1

1

Velour Roller



Velour roller suited for the application of hardwax oil as well as epoxy.

25 cm

AT31005000

1



TOOLS & ACCESSORIES

FASTENING







SANDING

COATINGS

FLOOR CARE

ACCESSORIES


Coatings

	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Edge Roller 	Small sized roller with extra large diameter for application of lacquer or paint along edges. 8 mm microfibre pile.				
	12 cm	AT31002500	1		
Roller Handle – 10 cm 	Handle for 10 cm rollers.				
	10 cm	AT31004000	1		
Roller Handle – 25 cm 	Handle for 25 cm rollers.				
	25 cm	AT31014001	1		
Roller Handle 30-50 cm 	Adjustable aluminium handle for 30-50 cm wide rollers.				
	30-50 cm	AT31002800	1	5	
Bona Extension Bar, quick release 	Professional extension bars in aluminium with quick-release locking function.				
	110-200 cm	AT31401002	1		
Bona Rollerbox 	Keeps the roller moist and ready for later use.				
	Red/Grey	AT31405000	1		



TOOLS & ACCESSORIES

Coatings

	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Bona Brush Short Handle 	High quality brush with fine, soft bristles and hardwood handle. Suitable for line-markings and other paint jobs.	50 mm	AT31112289	1	
Bona Brush Long Handle 	High quality brush with Medium-fine bristles and extra long handle for hard to reach areas. Suitable for edge brushing with waterborne lacquers.	50 mm	AT31112020	1	
Floor Brush 	High-quality floor brush with tightly packed, fine bristles. Suitable for hard wax oil and decking oil.	22 cm	AT31101000	1	
Floor Brush Pro 	Durable floor brush with tightly packed fine bristles made specifically for applying waterborne finish, waterborne paint and lye. Supplied in a convenient cover for safe storage and transportation.	30 cm	AT953214	1	
Pad Roller shaft 	Aluminium centre shaft. Required to be able to mount maroon abrasive rollers or microfiber rollers on the Bona PowerScrubber. Sold in single pack. Two pcs are needed to fully equip the Bona PowerScrubber.		AS3647622280	1	



TOOLS & ACCESSORIES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Coatings

Applicator Handle




Swivel-head applicator handle for Applicator Sleeve.

46 cm

AT956904

1

Applicator Sleeve



Foam and synthetic fibre sleeve for applying waterborne finish.

46 cm

AT956903

1

Oil Squeegee



Oil-resistant squeegee for quick and simple application of Bona oils. Can be attached to an extension bar.

50 cm

AT31302001

1

Disposable Booties



Single-use plastic shoe covers.

AT33051000

50

Stainless Steel Trowel



Stainless steel trowel for waterborne finishes, oils and fillers.

27 cm

AT959201

1

35 cm

AT31360350

1

Scraper



A floor scraper for those hard-to-reach areas such as corners, and close to the skirting board.

4 cm

AT929502

1

U-blade



4 cm

AT929503

1

2 cm

AT929504

1

Cotton Cloth



Rip-resistant cotton cloths for oiling, cleaning and buffing jobs.

50 x 55 cm

AT32086000

10 pcs



TOOLS & ACCESSORIES

Coatings

Lamella, Oak



Oak lamellas for repairing parquet floors.

352 x 73 x 3,8mm

AT32901201

44 pcs

Bona Mixing Bottle



Mixing bottle with clear volume markings that simplify the decanting of two-component finishes. Includes markings for Bona Traffic HD, Traffic, Traffic Anti Slip, Natural 2-comp & Bona Wave.

max. 1.9 L

30031

72 pcs

Hot Knife



Butane-driven hot knife for melting wax when repairing damages in wooden floors. Reaches operating temperature directly.

AT32053100

1

Resilient shoe cover



Blue and white resilient shoe covers.

AT33054000

1

100



TOOLS & ACCESSORIES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Coatings

Type

Article Number

Packaging

Pcs/transport
package

Package/
pallet

Bona Wax Repair Kit



Complete set for making quick and easy repairs to damaged wood, cork or laminate surfaces. The set includes 20 durable hardwax sticks and a butane-driven hot knife to melt the wax. The many different colours in the set will suit most wood types as is but it is also possible to combine waxes for a perfect match. The melted wax doesn't slump, making it possible to fill significant damages in the surface. Once set, the wax forms a hard, wear-resistant surface.

Key Benefits:

- Suitable for all types and colours of wood
- Capable of filling large scratches and cavities in the surface
- Fast repairs, repair is done and ready in a few minutes

Contents:

- Butane-driven hot knife
- 20 hard wax sticks
- Scraper
- Wiping cloth
- Needle

	AT32053600	1		
01 Transparent	AT32053001	1		
02 Pine	AT32053002	1		
03 Dark oak	AT32053003	1		
04 Beech	AT32053004	1		
05 Pear	AT32053005	1		
06 Oak	AT32053006	1		
07 Cherry	AT32053007	1		
08 Birch	AT32053008	1		
09 Light oak	AT32053009	1		
10 Ash	AT32053010	1		
11 Brown	AT32053011	1		
12 Yellow	AT32053012	1		
13 Eggshell	AT32053013	1		
14 Grey	AT32053014	1		
16 Cream	AT32053016	1		
17 Red	AT32053017	1		
19 Green	AT32053019	1		
20 Blue	AT32053020	1		
21 White	AT32053021	1		
22 Black	AT32053022	1		

Wax Repair Stick



TOOLS & ACCESSORIES

Fastening

Notched Blade Handle



For application of levelling compounds. Height adjustable.

560 mm	AT31444000	1	1	
--------	------------	---	---	--

Notched Blade 560 mm



For the application of levelling compounds.

R1	AT31444001	1	10	
R2	AT31344402	1	10	
R3	AT31344403	1	10	


Bona Mixing Bucket



30-litre mixing bucket.

30 L	30033	1		
------	-------	---	--	--

Bona Water Bucket 12,5 Liter



Water bucket for several applications.

12.5 L	30034	1		
--------	-------	---	--	--

Stir Stick



Stir stick for mixing two-component adhesives or primers.

80 mm	AT32051080	1		
-------	------------	---	--	--

Pull Bar



Pulling iron for installation of parquet. 55 cm long.

	AT32033000	1		
--	------------	---	--	--



TOOLS & ACCESSORIES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Fastening

Spike Roller



For venting levelling compounds. 50 cm wide.

50 cm

AT32052500

1

Tapping Block



Polyamid block without handle.

AT32038000

1

Spike Shoes



Nail shoes to be able to walk around in freshly applied material such as levelling compounds or epoxy primers.

AT32055000

1 pair

Bona Cleaning Wipes



Cleaning wipes for hard-to-remove materials. The textured tissue surface enables deep cleaning and easy dirt removal.

AT322100

72

Cork Strips



Cork strips for filling gaps between e.g. tile and wood flooring.

915 x 8 x 10 mm

AX34001001

25

915 x 10 x 15 mm

AX34002001

25

915 x 10 x 22 mm

AX34003001

25

915 x 15 x 22 mm

AX34004001

25

915 x 10 x 15 mm

AX34006001

25

Collomix stirrer DLX 152M M14



DLX mixing paddle for an optimal preparation of thin-bed mortars like Bona H600.


AT32014003

1






TOOLS & ACCESSORIES

Fastening

	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
Collomix Basket Strirrer KR 140, M14		The KR mixing paddle generates high shear forces when stirring for a lump free and homogenous mixture.		1	

Measurement

	Type	Article Number	Packaging	Pcs/transport package	Package/pallet
GANN Hydromette Compact B		Non-destructive moisture measurement for screeds.	1		
Surface Hardness Tester		Surface hardness tester for screeds, including guide plate.	1		
V-Head		For evaluating surface evenness.	1		



TOOLS & ACCESSORIES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Occupational Safety

Bona Antivibrate Sanding Glove



Anti-vibration sanding gloves. Certified to reduce the risk of carpal tunnel syndrome.

Type	Article Number	Packaging	Pcs/transport package	Package/pallet
L	AT331000L	1 pcs		
XL	AT331000XL	1 pcs		

3M Respirator Mask, 9310



Dust mask P1 against compact particles.

	AT33011100		20	
--	------------	--	----	--

3M Respirator Mask, 9322



Dust mask P2 against respirable dust.

	AT33012100		10	
--	------------	--	----	--

3M Respirator Mask, 9332



Dust mask P3 against respirable dust, with exhalation valve. Can be cleaned, therefore reusable.

	AT33013100		10	
--	------------	--	----	--



TOOLS & ACCESSORIES

Floor Care

Bona Commercial System Kit



Lightweight yet sturdy telescopic pole made of brushed aluminium for superior durability. The 60 cm wide mop base is specially designed with a raised edge that helps trap dirt and increases scrubbing pressure. Delivered with 1 Dusting Pad and 1 Cleaning Pad.

60 cm

WM710013489

1

10

Commercial Line Dusting Pad



Pad, designed to be used dry. Consisting of a special mix of short and long fibres with an electrostatic charge to trap and remove loose dust, dirt and debris, quickly and safely from floors.

60 cm

AX0003543

1

12

Commercial Line Cleaning Pad



Pad, designed to be used wet. Consisting of highly absorbent microfiber to effectively trap and lift dust, dirt, and grime from surfaces.

60 cm

AX0003544

1

12

Bona Premium Spray Mop for Wood Floors



Incredibly versatile, the Bona Premium Spray Mop for Wood Floors provides the ultimate care and protection for sealed wood floors. The pH-neutral formula is ready to use, dries quickly and leaves behind nothing but a streak-free natural shine. Forget about filling up a messy bucket - just spray for a quick and effective clean.

Key Benefits:

- Ergonomic light-weight design
- Extra-wide, swivel mop head
- Refillable bottle

Kit includes:

- Bona Spray Mop
- Bona Wood Floor Cleaner refillable bottle
- Bona Microfiber Cleaning Pad

CA201010011



TOOLS & ACCESSORIES

FASTENING

SANDING

COATINGS

FLOOR CARE

ACCESSORIES

Floor Care

Type

Article Number

Packaging

Pcs/transport
package

Package/
pallet

Bona Wood Floor Cleaner Refill



Bona Wood Floor Cleaner in economy-sized refills, can be used for both Bona Wood Floor Cleaner trigger sprayer and refillable bottle for spray mops. It is specifically designed to remove dust, dirt and grime safely from wood floors. Its ready-to-use formula dries quickly, and doesn't leave a residue behind.

Key Benefits:

- Water-based cleaning formula dries
- Residue-free, and safe for people and pets
- Tough on dirt, gentle on floor

WM740115011	2.5 L		
WM740119011	4 L		

Bona Hard-Surface Cleaner Refill



Bona Hard-Surface Floor cleaner in economy-sized refills, can be used for both Bona Hard-Surface Floor cleaner trigger sprayer and refillable bottle for spray mops. It is a rinse-free, streak-free formula that cleans hard-surface floors effectively by removing dust, dirt and grime.

Key Benefits:

- Water-based cleaning formula
- Residue-free, and safe for people and pet
- Dries fast for a streak free shine

WM740215021	2.5 L		
WM740219021	4 L		



APPLICATION ADVICE



1. Lacquer System
2. Natural Wood Look
3. SuperSport System
4. Craft Oil 2K System
5. Oil System
6. Hard Wax Oil
7. Adhesive Guidelines
8. Index of Bona Adhesives
9. Green Certifications



Lacquer System

1. Sanding – Coarse and medium with Bona Belt and Edge Sander or the Bona FlexiSand with Bona Power Drive



2. Application – Bona Mix&Fill Plus with a trowel

Consumption: 8–12 m²/lt
Drying time: 15–30 min
30–60 min until sanding
(20 °C, 60%)



3. Sanding – Fine with Bona FlexiSand with Bona Quattro Disc or Bona Multidisc and Edge Sander



4. Sanding – Final with Bona FlexiSand



5. 1st application – Choose one of the below Bona base coats and apply with Bona Microfibre Roller



Bona White
White washed look
1–3x with roller



Bona Natural
Look of pure wood
1–2x with roller



Bona Classic UX
The all-rounder
1x with roller



Bona Classic
The all-rounder
1x with roller



Bona Intense
Medium colouration
1x with roller



Bona Amber
Rich colouration
2x with roller



6. 2nd application – Choose one of the below Bona topcoats and apply with Bona Microfibre Roller



Domestic wear



Bona Domo
Consumption:
8–10 m²/lt
Drying time: 1–2 h
(20 °C, 60%)

Medium wear



Bona Mega
Consumption:
8–10 m²/lt
Drying time: 2–3 h
(20 °C, 60%)

or



Bona Mega EVO
Consumption:
8–10 m²/lt
Drying time: 1–2 h
(20 °C, 60%)

Heavy wear



Bona Traffic HD
Consumption:
8–10 m²/lt
Drying time: 2–3 h
(20 °C, 60%)



Bona Traffic GO
Consumption:
8–10 m²/lt
Drying time: 2–3 h
(20 °C, 60%)

7. Intermediate sanding with Bona FlexiSand or Bona Buffer



8. 3rd application – with the same Bona topcoat as used before




9. If extreme traffic is expected, an additional application of top coat is recommended



Natural Wood Look

1.

Sanding – Coarse and medium with Bona Belt and Edge Sander or the Bona FlexiSand with Bona Power Drive



2.

Application – Bona Mix&Fill Plus with a trowel



Consumption: 8–12 m²/lt


Drying time: 15–30 min

30-60 min until sanding

(20 °C, 60%)

3.

Sanding – Fine with Bona FlexiSand with Bona Quattro Disc or Bona Multidisc and Edge Sander



4.


Sanding – Final with Bona FlexiSand



5.

1st application – Bona Natural with Bona Microfibre Roller

(Consider adding Bona Blocker to Bona Natural for increased tannin resistance.)


- Domestic wear
-
- Bona Natural

Consumption:

8–10 m²/lt

Drying time: 1–2 h

(20 °C, 60%)
- Heavy wear
-
- Bona Natural


Consumption:

8–10 m²/lt

Drying time: 1–2 h

(20 °C, 60%)
6.

2nd application – Bona Mega EVO with Bona Microfibre Roller



-
- Bona Mega EVO Ultra Matt

Consumption:

8–10 m²/lt

Drying time: 2–3 h

(20 °C, 60%)
- 2nd application – Bona Traffic HD Raw with Bona Microfibre Roller


-
-
- Bona Traffic HD Raw


Consumption:


8–10 m²/lt

Drying time: 3 h


(20 °C, 60%)
7.


Intermediate sanding with Bona FlexiSand or Bona Buffer


- Intermediate sanding with Bona FlexiSand or Bona Buffer


8.

3rd application – Bona Mega EVO


- 3rd application – Bona Traffic HD Raw


- Bona Product Catalogue 2025
- 103

Bona SuperSport System

1.

Sanding – Coarse and medium with Bona Belt and Edge Sander or the Bona FlexiSand with Bona Power Drive



2.

Application – Bona Mix&Fill Plus with a trowel

Consumption: 8–12 m²/lt
Drying time: 15–30 mins
30–60 min until sanding
(20 °C, 60%)



3.

Sanding – Fine with Bona Belt and Edge Sander



4.

Sanding – Final with Bona FlexiSand or Bona Buffer



5.

1st Application – Bona SuperSport Primer with the Bona Microfibre Roller

SuperSport Primer
Consumption: 8–10 m²/lt
Drying time: 2–3 h
(20 °C, 60%)



6.

2nd Application – Bona SuperSport HD with the Bona Microfibre Roller

SuperSport HD
Consumption: 8–10 m²/lt
Drying time: 2–3 h
(20 °C, 60%)

Mix SuperSport HD with
SuperSport Hardener –
shake for 1 min



7.

Intermediate sanding with Bona FlexiSand or Bona Buffer



8.

Application – Line marking with Bona SuperSport Line Paint



SuperSport Line Paint
1 litre for approx. 80 m x 5 cm lines
1 litre for approx. 100 m x 4 cm lines

9.

Intermediate sanding with Bona FlexiSand or Bona Buffer and Bona Scrad System



10.

3rd and 4th application of Bona SuperSport HD using a Bona Microfibre Roller



Bona Craft Oil 2K System

1. Sanding – Coarse and medium with Bona Belt and Edge Sander or the Bona FlexiSand with Bona Power Drive



2. Application – Bona Mix&Fill Plus with a trowel

Consumption: 8–12 m²/lt
Drying time: 15–30 min
30–60 min until sanding
(20 °C, 60%)



3. Sanding – Fine with Bona Belt and Edge Sander



4. Sanding – Final with Bona FlexiSand or Bona Buffer



5. Application – Bona Craft Oil 2K

Consumption: approx. 30 m²/lit



6. Remove surplus with cotton cloths



7. Application – Bona Traffic HD or Bona Traffic HD Raw after min 8 h (12 h for pigmented oil)

Consumption: 8–10 m²/lt
Drying time: 3–4 h
(20 °C, 60%)



8. Intermediate sanding with Bona Scrad Pad



9. 2nd application – Using the same product as in the previous layer






Bona Traffic HD

Consumption:
8–10 m²/lt

Drying time: 2–3 h
(20 °C, 60%)

or




Bona Traffic HD Raw

Consumption:
8–10 m²/lt

Drying time: 3 h
(20 °C, 60%)

10. If extreme traffic is expected, an additional application of topcoat is recommended



Oil System

1. Sanding – Coarse and medium with Bona Belt and Edge Sander or the Bona FlexiSand with Bona Power Drive



2. Application – Bona Mix&Fill Plus with a trowel

Consumption: 8–12 m²/lt
Drying time: 15–30 min
30–60 min until sanding
(20 °C, 60%)



3. Sanding – Fine with Bona Belt and Edge Sander



4. Sanding – Final with Bona FlexiSand or Bona Buffer



5. Application of Bona Oil System – Choose one of the 3 treatments

Pure Oil treatment

Apply Bona Craft Oil with oil squeegee, rubber blade, steel trowel or Bona Wool Pad until wood is saturated



Massage oil into wood using green pad for neutral oil, or red pad for coloured oil, attached to Bona FlexiSand



Remove surplus oil with cotton cloth and allow to dry



For best results dry buff surface with Bona Wool Pad.



Oil treatment with Bona Nordic Tone

Apply Bona Nordic Tone with an application sleeve. Leave to dry for 4–5 hours



Bona Nordic Tone
Consumption:
8–10 m²/L
Drying time: 2–3 h
(20 °C, 60%)



Fine sanding using Bona FlexiSand and Bona Scrad Pad. Remove dust with a vacuum cleaner



Apply Bona Craft Oil with oil squeegee, rubber blade, steel trowel or Bona Wool Pad until wood is saturated



Massage oil into wood with red pad attached to Bona FlexiSand

Remove surplus oil with cotton cloth and allow to dry



For best results dry buff surface with Bona Wool Pad.



Oil treatment with Bona Rich Tone

Apply Bona Rich Tone with an application sleeve. Leave to dry for 4–5 hours



Bona Rich Tone
Consumption:
8–10 m²/L
Drying time: 2–3 h
(20 °C, 60%)



Fine sanding using Bona FlexiSand and Bona Scrad Pad. Remove dust with a vacuum cleaner



Apply Bona Craft Oil with oil squeegee rubber blade, steel trowel or Bona Wool Pad until wood is saturated



Massage oil into wood with red pad attached to Bona FlexiSand


Remove surplus oil with cotton cloth and allow to dry



For best results dry buff surface with Bona Wool Pad.



Apply a thin coat of Bona Hard Wax Oil. Allow 8–10 hours for drying



Hard Wax Oil

1.	Sanding – Coarse and medium with Bona Belt and Edge Sander or the Bona FlexiSand with Bona Power Drive	
2.	Application – Bona Mix&Fill Plus with a trowel	Consumption: 8–12 m²/lt Drying time: 15–30 min 30-60 min until sanding (20 °C, 60%) 
3.	Sanding – Fine with Bona Belt or Bona FlexiSand and Edge Sander	
4.	Sanding – Final with Bona FlexiSand or Bona Buffer	
5.	Matt/Silk Matt	
5.1	1 st application with Bona Hard Wax Oil. Apply a thin layer with a Microfiber Roller	
	Application tool: Bona Microfiber Roller 5 mm	
		Bona Hard Wax Oil Consumption: Depending on type of wood – approx. 1 L for 20–24 m². Drying time: 6–8 h
5.2	Abrade with Bona Scrad Pad	
5.3	2 nd application: Very thin layer with a Microfiber Roller	

Adhesive Guidelines

Flooring	EN/DIN Standard	Type	Consumption g/m ²	R848	R848T	Quantum/T	Titan
Parquet strip and mosaic parquet finger 1-layer (solid) unfinished elements	EN 13226	parquet strip of oak and similar wood types	1000/1250	—	✓	✓	✓
	EN 13226	parquet strip of beech and similar highly-absorbent wood types	1000/1250	—	✓	✓	✓
	EN 13488	mosaic parquet finger	850	✓	✓	✓	✓
	EN 13228	blocks/overlay, oak or similar wood width/thickness < 5/1	1000/1250	—	✓	✓	✓
	EN 13228	blocks/overlay, beech and similar highly-absorbent wood types < 5/1	1000/1250	—	—	✓	✓
	EN 14761	wood flooring - solid wood parquet – vertical finger, wide finger and module brick – 10/16/22 mm	1000/1250	✓*	✓*	✓*	✓
	EN 13227	wood flooring – solid lam parquet products up to 25 x 5 cm, oak and similar wood types	1000	—	—	✓	✓
	EN 13227	wood flooring – solid lam parquet products up to 25 x 5 cm, beech and similar highly-absorbent wood types	1000	—	—	✓	✓
	EN 13629	solid hardwood flooring and solid hardwood flooring composite elements	1000	—	—	✓	✓
	EN 13629	wood flooring – solid lam parquet products larger than 25 x 5 cm	1250/1500	—	—	—	✓
1-layer parquet element, factory prefinished	EN 13488	small formats, oak and similar wood types	850	✓	✓	✓	✓
	EN 13488	small formats, beech and similar highly-absorbent wood types	850	—	—	✓	✓
	EN 13226	parquet strip with groove and tongue	1000/1250	—	✓	✓	✓
Multilayered parquet element, factory prefinished	EN 13489	2-layer, parquet strip	1000	✓	✓	✓	✓
	EN 13489	2-layer, parquet panel	1000/1250	✓	✓	✓	✓
	EN 13489	3-layer flooring board: < 13 mm thick	1250	✓	✓	✓	✓
	EN 13489	3-layer flooring board: 10–13 mm thick, less than 1200 mm	1250	✓	✓	✓	✓
	EN 13489	3-layer flooring board: 10–13 mm thick, longer than 1200 mm	1250	✓	✓	✓	✓
Multilayered parquet element, unfinished	EN 13489	2-layer	1000	✓	✓	✓	✓
Wood block (end grain floors)	DIN 68702	Wood block RE & WE up to 40 mm thickness	1000/1500	—	—	—	✓
	DIN 68702	Wood block GE > 40 mm thickness (industrial)	1250/1500	—	—	—	—

* R848/R848T/Quantum/Quantum T only for 16 and 22 mm

Subfloor Construction	Binding Material according to EN 13813	Type of subfloor				
Floating screed including calcium sulphate screed also with underfloor heating system and self-levelling compounds	CT	Cementitious (heated) screed	✓	✓	✓	✓
	CA	Calcium sulphate (heated) screed	✓	✓	✓	✓
	CA	Calcium sulphate floating screed	✓	✓	✓	✓
	AS	Mastic asphalt, well-sanded**	✓	✓	✓	✓
	CT/CA	Self-levelling compounds	✓	✓	✓	✓
Wood substrate		Chipboard, OSB, plywood	—	✓	✓	✓

General: Whether you use a fine or coarse trowel depends on the condition of the subfloor and the dimensions of the parquet elements

****** When using Bona's silane-based adhesives, a protection primer such as R540 or Bona R410 is necessary prior to the installation of the parquet

Bona R848: can be used under suitable conditions for the installation of solid parquet, such as mosaic and block parquet with proper dimensions. Please contact your local Bona technical team for more information.

Index of Bona Adhesives

Overview of the technical properties of our reactive primers and adhesives

Product name	Base	Consumption of primer in g/m ²	Consumption as moisture barrier on CT or concrete floors in g/m ²	Barrier effect up to max. residual moisture content	Drying time in general/ Drying time in combination with our reactive adhesives
R540	1-comp. polyurethane	Approx. 150–250	Approx. 300 (two applications)	Yes, up to max. 5.0 cm/% or 95 % rH *2	24 hrs. with all Bona R848(T)/Quantum(T) 6 hrs. with Bona Titan
R590*	Silane based	500	500 (with one application)	Yes, up to max. 5.0 cm/% or 90% relative humidity	4-6 h with all Bona silane based adhesives

* The broadcasting of quartz sand (grit size 0.3–0.8) is possible prior to the usage of a Bona levelling compound.









*2 By applying two coats of Bona R540 within 24 hours, when the following parquet installation will be carried out with a Bona silane adhesive.

Special note:

- Normally, concrete floors need to be shot-blasted as a mechanical pre-treatment.
- For any further processing information, please view our technical data sheets at www.bona.com






Please note: The information in this document and all other advice and recommendations that we provide to help and assist the applicator are based on previous experience and extensive testing but makes no claim to be complete. Because of the wide range of possible uses and conditions of application of our products, we do not relieve users from the need to carry out their own trials or to seek technical advice from Bona before use. Bona can only guarantee its products and not the construction as a whole. Observe recommendations from flooring manufacturer and the provisions of relevant standards.

Bona Product Certificates and Qualifications

Product	       							
	COATINGS							
Bona Traffic HD Raw	EC1	✓	✓	✓	✓	✓	✓	
Bona Traffic HD*	EC1	✓	✓	✓	✓	✓	✓	✓
Bona Traffic GO*	EC1 ^{PLUS}	✓	✓	✓	✓	✓	✓	✓
Bona Mega EVO*	EC1 ^{PLUS}	✓	✓	✓	✓	✓	✓	
Bona Mega*	EC2		✓	✓	✓	✓	✓	
Bona Domo*				✓	✓	✓		
Bona Classic	EC1 ^{PLUS}	✓	✓	✓	✓	✓		
Bona Classic UX	EC1 ^{PLUS}	✓	✓	✓	✓	✓	✓	✓
Bona White	EC1 ^{PLUS}	✓	✓	✓	✓	✓		
Bona Natural	EC1 ^{PLUS}	✓	✓	✓	✓	✓		
Bona Intense	EC2		✓	✓	✓	✓		
Bona Amber				✓	✓	✓		
Bona SuperSport HD*	EC2	✓	✓		✓	✓	✓	
Bona SuperSport One*	EC2	✓	✓		✓	✓	✓	
Bona SuperSport Pure HD	EC1	✓	✓		✓	✓	✓	
Bona LinoPrime	EC1 ^{PLUS}	✓	✓		✓			
Bona Pure Colour	EC1 ^{PLUS}	✓	✓		✓	✓	✓	
Bona Pure HD	EC1	✓	✓		✓	✓	✓	✓
Bona Pure ESD Clear	EC1 ^{PLUS}	✓	✓		✓			
Bona Pure ESD Vibrant	EC1 ^{PLUS}	✓	✓		✓			
Bona Pure ESD Colour					✓			
Bona Craft Oil 2K	EC1	✓	✓	✓	✓	✓	✓	

* All sheens

Bona Product Certificates and Qualifications

<div>       </div>							
Product							
ADHESIVES							
Bona Titan	EC1 ^{PLUS}	✓	✓	✓	✓	✓	✓
Bona Quantum	EC1 ^{PLUS}	✓	✓	✓	✓	✓	✓
Bona Quantum T	EC1 ^{PLUS}	✓	✓	✓	✓	✓	
Bona R848	EC1 ^{PLUS}	✓	✓	✓	✓		✓
Bona R848T	EC1 ^{PLUS}	✓	✓	✓	✓		
Bona D750	EC1 ^{PLUS}	✓	✓	✓	✓		
Bona Quantum LVT	EC1 ^{PLUS}	✓	✓	✓	✓		
Bona Vertical	EC1 ^{PLUS}	✓	✓	N/A	✓		
PRIMERS/REPAIR							
Bona R590	EC1 ^{PLUS}	✓	✓		N/A		
Bona D501	EC1 ^{PLUS}	✓	✓		N/A		
Bona D515	EC1 ^{PLUS}	✓	✓		N/A		
Bona R540	EC1 ^{PLUS}	✓	✓		N/A		
Bona R440	EC1 ^{PLUS}	✓	✓		N/A		
LEVELLING COMPOUNDS							
Bona H600	EC1 ^{PLUS}	✓	✓		✓		
Bona H610	EC1 ^{PLUS}	✓	✓		✓		
Bona H660	EC1	✓	✓		✓		
OTHERS							
Bona U300	EC1 ^{PLUS}	✓	✓		✓		
Bona U310	EC1 ^{PLUS}	✓	✓	✓	✓		
Bona U340	EC1 ^{PLUS}	✓	✓	✓	✓		
Bona U350	EC1 ^{PLUS}	✓	✓	✓	✓		

Index - Products

Product	Page	Product	Page
3M Respirator Mask, 9310	97	Bona Intense	63
3M Respirator Mask, 9322	97	Bona Intermediate Pad	57
3M Respirator Mask, 9332	97	Bona LinoPrime	75
Adapter Kit 1	32	Bona Master Trowel 280 mm	21
Adapter Kit 2	32	Bona Master Trowel 180 mm	22
Adhesive gun	20	Bona Mega	66
Air Adjustment Adapter	32	Bona Mega EVO	65
Applicator Handle	91	Bona Microfibre Roller	88
Applicator Sleeve	91	Bona Microfleece Roller	88
Bona 8100 Silicon Carbide	52	Bona Mini Buffer	40
Bona 8300 Zicron Mix	48	Bona Mini Buffer Microfiber Pad	40
Bona 8500 Aluminium Oxide	51	Bona Mix Colour	73
Bona 8600 Green Ceramic	47	Bona Mix&Fill	74
Bona 8700 Ceramic Mix	46	Bona Mix&Fill Plus	74
Bona Amber	63	Bona Mixing Bottle	92
Bona Antivibrate Sanding Glove	97	Bona Mixing Bucket	94
Bona Belt	37	Bona MultiDisc	28
Bona Belt Lite	37	Bona Natural	62
Bona Belt UX	36	Bona Net Alox	58
Bona Blocker	67	Bona Net Ceramic	58
Bona Box L	43	Bona Nordic Tone	73
Bona Box XL	43	Bona Notched Trowel	21
Bona Box Trolley	43	Bona Notched Trowel Box 180 mm	22
Bona Brush Long Handle	90	Bona Notched Trowel Box 280 mm	21
Bona Brush Short Handle	90	Bona Oil Care	85
Bona Buffer	40	Bona Oil Soap	85
Bona Capricorn	38	Bona Oiled Wood Floor Refresher	84
Bona CEE Adapter	36	Bona OptiSpread 2.0	20
Bona Classic	63	Bona OptiSpread UX	20
Bona Classic UX	62	Bona Orbital	35
Bona Cleaner	84	Bona Pad 407 mm	54
Bona Cleaning Wipes	95	Bona Pad Drive	28
Bona Clean R50	79	Bona Polish Gloss	83
Bona CombiEdge	34	Bona Polish Matt	83
Bona CombiEdge Stair Support	35	Bona Power Drive	27
Bona Commercial System Kit	98	Bona Power Drive Connect	29
Bona Concrete Disc	30	Bona Power Drive Connect Metal Brush	29
Bona Craft Oil	71	Bona Power Drive Connect Nylon Brush	29
Bona Craft Oil 2K	70	Bona Power Drive Connect Sanding Disc	29
Bona D501	12	Bona PowerRemove R	79
Bona D515	12	Bona PowerScrubber 2.0	82
Bona D750	16	Bona Premium Spray Mop	98
Bona DCS 25	33	Bona PU Filler	74
Bona DCS 50	33	Bona Pure ESD Clear	78
Bona DCS 70	32	Bona Pure ESD Vibrant	78
Bona Decking Oil	72	Bona Pure HD	75
Bona Deep Clean Solution	82	Bona Pure Colour	76
Bona Diamond Abrasive Disc	57	Bona Pure Colour ESD	77
Bona Diamond Blades	30	Bona Quantum	17
Bona Diamond Blades Spare blades	30	Bona Quantum LVT	19
Bona DualEdge	34	Bona Quantum T	17
Bona Domo	66	Bona Quattro Disc	28
Bona Edge UX	34	Bona Quick	63
Bona ErgoEdge Kit	30	Bona R Creative Chips	77
Bona Expansion Strips	14	Bona R200	16
Bona Extension Bar, quick release	89	Bona R440	10
Bona Fibres	14	Bona R540	11
Bona Fiber Pad	55	Bona R590	11
Bona Fiber Pad, velcro backing	55	Bona R848	18
Bona FlexiSand	26	Bona R848T	18
Bona FlexiVacuum	31	Bona Remover	83
Bona Freshen Up	84	Bona RenoForce	10
Bona Fusion Pad	35	Bona Retarder	67
Bona Gap Master	23	Bona Rich Tone	73
Bona H600	13	Bona Rollerbox	89
Bona H610	13	Bona Sanding Disc	41
Bona H660	13	Bona Sanding Screen, double-sided	56
Bona Hard-Surface Cleaner Refill	99	Bona Service Kits	44
Bona Hard Wax Oil	71	Bona Scorpion	38

Index - Products

Product	Page	Product	Page
Bona Scorpion DCS	39	Notched Blade 560 mm	94
Bona Scrad Pad	55	Notched Blade Handle	94
Bona Scrad Wing	56	Oil Squeegee	91
Bona Shield R	79	Pad Roller Shaft	90
Bona SuperCoat Roller	88	PCD Maxi Segment	31
Bona SuperSport Cleaner	70	Power Stripper	42
Bona SuperSport Deep Clean	69	Pull Bar	94
Bona SuperSport Line Paint	69	Quartz Sand	11
Bona SuperSport Primer	68	Quattro Disc	41
Bona SuperSport HD	68	Replacement Pad Set	28
Bona SuperSport ONE	68	Resilient shoe cover	92
Bona SuperSport Pure HD	75	Roller Brush	82
Bona Superpad	54	Roller Handle – 10 cm	89
Bona Steel Plates set	30	Roller Handle – 25 cm	89
Bona Titan	16	Roller Handle 30-50 cm	89
Bona Traffic GO	65	Sanding Disc	41
Bona Traffic HD	64	Scraper	91
Bona Traffic HD Anti-slip	64	Spike Roller	95
Bona Traffic HD Raw	64	Spike Shoes	95
Bona Trowel Plus	21	Split Segment	31
Bona Trowel 500F	20	Stainless Steel Trowel	91
Bona U300	14	Stir Stick	94
Bona U310	15	Suction bar	82
Bona U340	15	Surface Hardness Tester	96
Bona U350	15	Tampico brush	28
Bona Vertical	19	Tapping Block	95
Bona Water Bucket 12,5 Liter	94	Transport Cart - Bona Belt	37
Bona Wax Oil	85	Transport Cart - Bona Belt UX	36
Bona Wax Repair Kit	93	Tynex Distressing Drum	39
Bona White	62	Tower/Spacer for Flexisand Sanding Disc	29
Bona Wood Floor Cleaner Refill	99	Resilient shoe cover	84
Bona Wool Pad	55	U-blade	91
Collomix Basket Strirrer KR 140, M14	96	Vacuum Sealing Ring	41
Collomix stirrer DLX 152M M14	95	Wave Bonders	10
Commercial Line Dusting Pad	98	Wax Repair Stick	93
Commerica Line Cleaning Pad	98	Velour Roller	88
Cork Strips	95	V-Head	96
Cotton Cloth	91		
Delta Abrasive Paper	57		
Diamond Sanding Plate	59		
Diamond Segment	31		
Disposable Booties	91		
Disposable Dust Bag Small	35		
Disposable Dust Bag Large	38		
Drive Disc - Bona Buffer	41		
Drive Disc - Bona Mini Buffer	40		
Dust Bag – Cloth	41		
Dust Bag – Paper	41		
Dust Bags LongoPac	32		
Edge Roller	89		
External Soft Start	36		
Extra Weight - Belt	37		
Extra Weight - Buffer	40		
Fein MultiMaster saw blades	42		
Filter bag	67		
Flat pleated filter	33		
Fleece Dust Bag	33		
Fleece Filter Bag	33		
FlexiVacuum Filter Dust Bag	31		
Floor Brush	90		
Floor Brush Pro	90		
GANN Hydromette Compact B	96		
Hot Knife	92		
Internal Spur Gear	27		
Kickstand	27		
Lamella, Oak	92		
LED light bar	26		
Magnetic Extra Weight - Flexisand	27		
Metal Distressing Drum	39		

Bona[®]

Bona is a family-owned, sustainably driven company that supplies products for installing, renovating, maintaining and restoring premium floors. Founded in 1919, Bona was the first in the industry to offer a full system of waterborne wood floor finishing and floor care products.

Today, Bona offers products for most premium floor surfaces including wood, tile, vinyl, resilient, rubber and laminate. The head office is in Malmö, Sweden, and the company is represented globally by its 16 subsidiaries, 70 distributors, 600 employees and 4 production sites. For more information visit www.bona.com

